



Extremely Flexible/Durable


Features

- ✓ IP65
- ✓ CRI>83
- ✓ No Flicker UGR<19
- ✓ 20cm Can be Cut
- ✓ Easy Installation


Benefits

- ✓ High Energy Saving
- ✓ High Efficiency
- ✓ Eye Protection
- ✓ Long Life Time
- ✓ Private Mold

Application

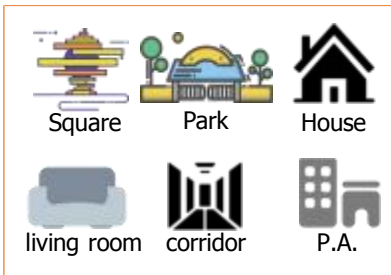

Certificate

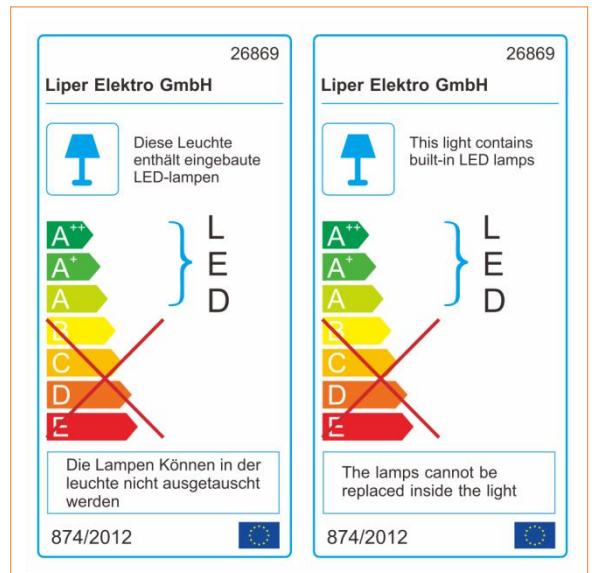

Specifications

Item Number	Power (W/M)	Power Factor	Lumen (lm)	LED Line	LEDs pcs	CRI	Color Temperature	Life Time (hrs)
LPSTL-7A01	7W/M	>0.9	700±10	1 line	120	>83	3000K	30000
LPSTL-7A01	7W/M	>0.9	700±10	1 line	120	>83	4000K	30000
LPSTL-7A01	7W/M	>0.9	700±10	1 line	120	>83	6500K	30000
LPSTL-12A01	12W/M	>0.9	1200±10	2 lines	120	>83	3000K	30000
LPSTL-12A01	12W/M	>0.9	1200±10	2 lines	120	>83	4000K	30000
LPSTL-12A01	12W/M	>0.9	1200±10	2 lines	120	>83	6500K	30000



Technical Specifications

On/Off Cycles	100,000
Color Tolerance Adjustment (SDCM)	<6
IP	65
Class	II
LED Driver	Non
LED Beads	120pcs 2835 LEDS
Housing Color	White
Pressure Resistant	3000V

Temperature

Operating Temperature	-15°C ~ 50 °C
Testing Temperature	-20°C ~ 95 °C

Packing Data

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
LPSTL-7A01	100m/r, 1 Roll	8.8	7.8	33	33	25
LPSTL-12A01	100m/r, 1 Roll	8.8	7.8	33	33	25

Dimensional Drawing

Item No	Power	Width (mm)	Cutting Size (mm)
LPSTL-7A01	7W	80	20
LPSTL-12A01	12W	110	20

Application Scenarios







Power Supply



carry 50 meters at most

For technical information contact the Technical Assistance Service or visit liperlighting.com

Installation Instruction

Accessories for High Voltage strips			
			
Power Connector	End Cup	Mounting Clip	Splice Connector
<p>A. Cut the strip at the point printed with the mark of scissor</p> <p>B. Aim the navigating pin of the power wire to the electric line of the strip and plug it into the strip vertically</p> <p>C. Inject glass glue</p> <p>D. Seal the tail part of the strip with the end cap</p> <p>E. Plug the splice connector vertically to the strip</p> <p>F. Inject glass glue</p>			

