


Features

- ✓ IP65
- ✓ CRI>83
- ✓ No Flicker UGR<19
- ✓ 20cm Can be Cut
- ✓ Easy Installation


Benefits

- ✓ High Energy Saving
- ✓ High Efficiency
- ✓ Eye Protection
- ✓ Long Life Time
- ✓ Private Mold

Application

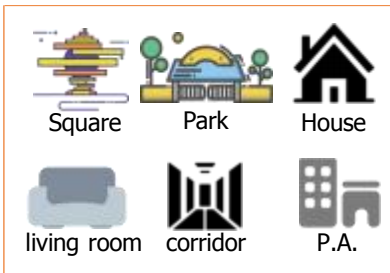

Certificate

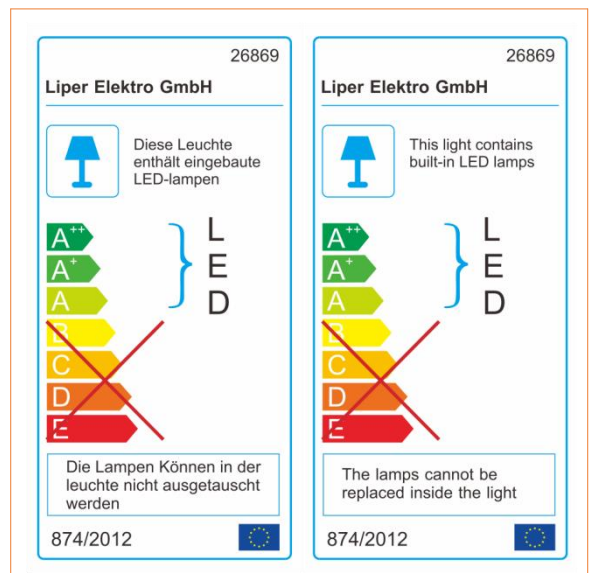

Specifications

Item Number	Power (W/M)	Power Factor	Lumen (lm)	LED Line	LEDs pcs	CRI	Color Temperature	Life Time (hrs)
LPSTL-12B01	12W/M	>0.9	900LM/M	1 line	288	>83	Cool White	30000
LPSTL-12B01	12W/M	>0.9	900LM/M	1 line	288	>83	Natural White	30000
LPSTL-12B01	12W/M	>0.9	900LM/M	1 line	288	>83	Warm White	30000



For technical information contact the Technical Assistance Service or visit liperlighting.com

Technical Specifications

On/Off Cycles	100,000
Color Tolerance Adjustment (SDCM)	<6
IP	65
Class	II
LED Driver	Non
LED Beads	288pcs COB1616 LEDs
Housing Color	White
Pressure Resistant	3000V

Temperature

Operating Temperature	-15°C ~ 50 °C
Testing Temperature	-20°C ~ 95 °C

Packing Data

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
LPSTL-12B01	100m/r, 1 Roll	2.7	2.5	22.5	19.5	20

Dimensional Drawing

Item No	Power	Width (mm)	Cutting Size (mm)
LPSTL-12B01	12W	10	20

Application Scenarios



Power Supply



carry 50 meters at most

For technical information contact the Technical Assistance Service or visit liperlighting.com