



### Features

- ✓ CRI>83
- ✓ CCT Adjustable
- ✓ No Flicker
- ✓ UGR<19
- ✓ Elegant Light


### Benefits

- ✓ High Energy Saving
- ✓ High Efficiency
- ✓ Eye Protection
- ✓ Long Life Time
- ✓ Private Mold

### Application



### Certificate

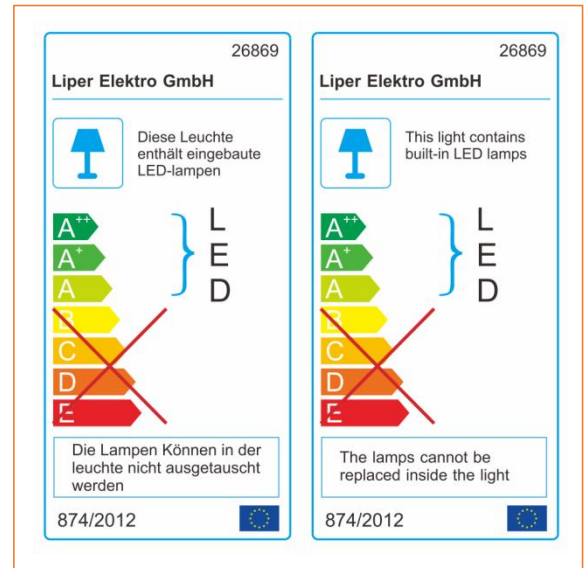

### Specifications

Item Number	Power (W)	Power Factor	Lumen (lm)	Efficiency (lm/W)	Input Current	CRI	Color Temperature	Life Time (hrs)
LPDL-05EWS01-Y	5W	>0.5	425-500	85±10	35mA	>83	CW/NW/WW/CCT	50000
LPDL-08EWS01-Y	8W	>0.5	680-720	85±10	65mA	>83	CW/NW/WW/CCT	50000
LPDL-12EWS01-Y	12W	>0.5	1020-1060	85±10	92mA	>83	CW/NW/WW/CCT	50000
LPDL-18EWS01-Y	18W	>0.5	1530-1570	85±10	140mA	>83	CW/NW/WW/CCT	50000



Technical specifications

On/Off Cycles	>100,000
Color Tolerance Adjustment (SDCM)	<6
IP	44
Class	II
LED Driver	DOB
LED Beads	2835 6V/150MA
Housing Color	White
Pressure Resistant	3000V
Wire Diameter and Material	0.75 mm <sup>2</sup> Copper Wire

Electrical Supply

Power Range	4.5-5.5W	7.2-8.8W	10.8-13.2W	16.2-19.8W
Frequency (Hz)	50/60	50/60	50/60	50/60
Voltage (V)	100-240	100-240	100-240	100-240
AC/DC	AC	AC	AC	AC
Input Current	35mA	65mA	92mA	140mA
Output Voltage	DC48V	DC51V	DC87V	DC144V
Output Current	150mA	140mA	125mA	110mA

Lights Material

Housing Material	Plastic
Optical Material	Plastic

Temperature

Operating Temperature	-15°C ~ 50 °C
Testing Temperature	-20°C ~ 95 °C


### Dimensional Drawing

Item No	Power	Diameter (mm)	Height (mm)	Cut out Size (mm)
LPDL-05EWS01-Y	5W	88	28	65-80
LPDL-08EWS01-Y	8W	112	30	90-100
LPDL-12EWS01-Y	12W	175	33	145-150
LPDL-18EWS01-Y	18W	222	35	185-200

### Packing Date

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
LPDL-05EWS01-Y	100	5.6	3.4	47.5	20.5	39.5
LPDL-08EWS01-Y	60	4.9	3.2	48	20.5	37.5
LPDL-12EWS01-Y	30	5.4	3.5	54.5	24.5	37.5
LPDL-18EWS01-Y	16	4.3	2.8	46	36.5	25

### Planar Intensity Distribution Curve

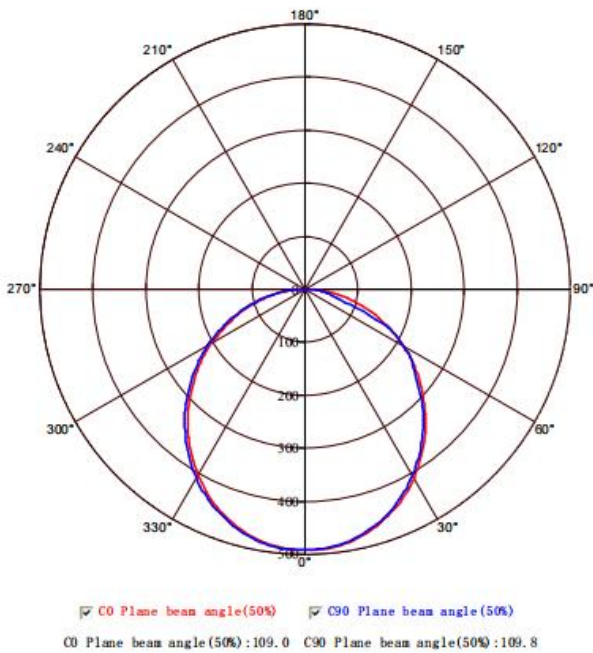

### Average Illumination

