

liper

2024.10



GERMANY LIPER ELECTRICAL CO.,LTD

ZHEJIANG LIPER LIGHTING TECHNOLOGY CO., LTD

Add:No. 580 Binhai 2nd Road, Yongxing Street, Longwan District, Wenzhou City, Zhejiang Province, China
TEL:+86-577-8682 7777 86-577-8682 5888
FAX:+86-577-8681 5838
E-mail:admin@liperlighting.com

www.liperlighting.com
<https://www.facebook.com/LiperGermany>



Established in Germany in 1912...



LED



Das einzige unveränderliche Thema - Qualität

Brilliant light,
the unique eternal topic-----
quality.

liper

ESTABLISHED IN GERMANY IN 1912






Firmenprofil >>>

COMPANY PROFILE

Zhejiang Liper Beleuchtungstechnik AG(Kurze Einführung)

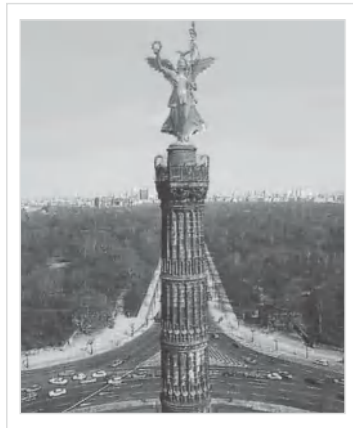

Im Dezember 2015 etablierten Liper Elektrogeräte GmbH in Deutschland und Zhejiang Liper Beleuchtungstechnik AG offiziell eine strategische Partnerschaft. Deutsche Führungskräfte und chinesische Vertreter unterzeichneten eine strategische Kooperationsvereinbarung in Deutschland. Die beiden Seiten beginnen mit der vielseitigen Zusammenarbeit, was signalisiert, dass Liper Beleuchtungstechnik AG zu einer neuen Etappe gegangen ist. Ein Flugzeugträger in internationaler Beleuchtungsindustrie wird bald abfahren.....

Wir werden die Vorteile der deutschen Industrietechnologie und den kontinuierlich verbesserten germanischen Geist voll integrieren, um ausgezeichnete Leistungen und nachhaltige Entwicklung zu erzielen und die ganzheitlichen Beleuchtungslösungen mit Weltrang für die weltweite kommerzielle Beleuchtung, Innenbeleuchtung und Außenbeleuchtung zu bieten. Dies ist eine Erweiterung des beidseitigen strategischen Layout. Darüber hinaus werden das neue Zusammenarbeitsmodell und die Strategie tiefgreifende Auswirkungen auf LED-Beleuchtungsindustrie haben.

Nach jahrelangen Entwicklungen hat Liper Beleuchtungstechnik AG sich zu einem globalen Beleuchtungsgeschäft entwickelt, was Forschung und Entwicklung, Produktion sowie Vertrieb integriert und mehr als 2.000 bestehende Mitarbeiter hat. Das Unternehmen hält sich an das "menschenorientierte" Entwicklungskonzept und legt großen Wert auf die Errichtung des Talentteams, technologische Talente kraftvoll einzuführen und zu trainieren. Das Unternehmen führt die deutschen fortschrittlichen Technologien und Ausrüstungen umfassend ein und errichtet F&E-Zentrum und Laborator auf nationaler Ebene. Es hat ein professionelles Team zum Management vom Betrieb, dessen Produkte auf der ganzen Welt verkauft werden. Zudem gründet es Niederlassungen und Geschäftsstellen in Europa, Mittlerem Osten, Südamerika, Südostasien, Afrika und anderen Regionen.

Durch die Zusammenarbeit zwischen Liper Beleuchtungstechnik AG und Liper Elektrogeräte GmbH in Deutschland, werden die beide Seiten ihre jeweiligen professionellen Vorteile im Produktionsmanagement und technischen Bereich voll integrieren, die Zusammenarbeit in F & E und Produkt durchzuführen, während in Markt, Kanal und Vertrieb zusammenzuarbeiten. Die "Liper Beleuchtung" entwickelt sich zum globalen Beleuchtungsgeschäft und zur führenden Beleuchtungsmarke Chinas. Bei der Gestaltung der internationalen Marke engagiert das Liper-Personal sich immer für die Gesinnung eines grünen, harmonischen, energiesparenden und kohlenstoffarmen neuen Lebens, um eine bessere Beleuchtungsumgebung für die ganze Welt zu schaffen und das Leben jeden Tag zu beleuchten!

Liper lässt die Welt energiesparender!

Zhejiang Liper Lighting Technology Co., Ltd


By officially reaching a strategic partnership on December 2015 upon signing of a strategic cooperation agreement between top leaders of the German company and representatives of its Chinese counterpart in Germany, Germany Liper Electric Co., Ltd and Zhejiang Liper Lighting Technology Co., Ltd have conducted all-round cooperation, marking a new stage of Liper's development. An aircraft carrier in the international lighting industry is about to set sail.....

We will fully integrate the German superior industrial technologies and improve German spirits to achieve excellence in performance and sustainable development, so as to provide world first-class integrated lighting solutions for the global commercial lighting, indoor lighting and outdoor lighting. It is not only an extension of the strategic layout of the two sides, but the new cooperation pattern and strategy will bring a far-reaching impact on the LED lighting industry.

After years of development, Liper now has grown into a global lighting enterprise engaged in product R & D, production and sales. The company currently employs more than 2000 people and attaches great importance to the establishment of high-quality talent team with great efforts made to introduce and cultivate talents of science and technology, under the "people-oriented" development philosophy. By widely introducing a full set of advanced technologies and equipment from Germany, setting up a state-level R & D center and laboratory, and putting business under management of the professional team, the company has exported its products to markets throughout the world with subsidiaries and offices in Europe, the Middle East, South America, Southeast Asia, Africa and other regions.

Based on business cooperation, Liper and Germany Liper will fully integrate their professional advantages in production management and technology for cooperation in R & D and products as well as in the fields of marketing, channels and sales, so that Liper will grow into a global lighting company as the leader brand in Chinese lighting industry. In shaping an international brand, Liper workers are still committed to promoting new views of green, harmonious, energy saving and low-carbon life, to create a better light environment for the world and light the life every day!

Liper make the world more energy saving!

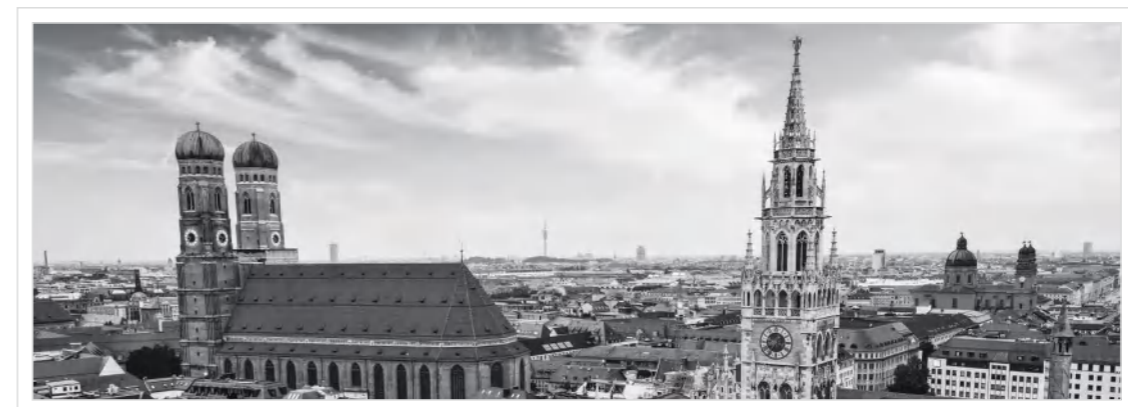

Contents



Gruppenfoto von Vorstandsvorsitzender Herr Wang Renle und Staatspräsident
Board Chairman Mr.Wang Renle take group photo with Chinese former and current president



Links vierte in der zweiten Reihe
The second row of the fourth on the left



Rechts erst in der zweiten Reihe
The second row of the first on the right



LED FLOOD LIGHT

001-014



LED STREET LIGHT

015-020



LED SOLAR LIGHT

021-034



LED UFO LIGHT

035-038



LED LAMP

039-042



LED STEP LIGHT

043-044



LED WALL LIGHT

045-046



LED DOWN LIGHT

047-088



LED TRACK LIGHT

089-092



LED LOUVER FITTING

093-094



LED TUBE

095-101



LED STRIP LIGHT

102-103



LED MAGNETIC TRACK LIGHT

104-108

Brilliant light,
the unique eternal topic-----
quality.



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-20BT01	● 20W	2000-2080LM	N	114x90x29mm
LPFL-30BT01	● 30W	3000-3080LM	N	136X118X29mm
LPFL-50BT01	● 50W	5000-5080LM	N	175X152X29mm
LPFL-100BT01	● 100W	10000-10500LM	N	236x202x32mm
LPFL-200BT01	● 200W	20000-20500LM	N	301X251X35mm
LPFL-300BT01	● 300W	30000-30500LM	N	330x302x35mm

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-20BT02	● 20W	2000-2080LM	N	114x90x29mm
LPFL-30BT02	● 30W	3000-3080LM	N	136X118X29mm
LPFL-50BT02	● 50W	5000-5080LM	N	175X152X29mm
LPFL-100BT02	● 100W	10000-10500LM	N	236x202x32mm





Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-200BT02	● 200W	20000-20500LM	N	301X251X35mm
LPFL-300BT02	● 300W	30000-30500LM	N	330x302x35mm
LPFL-400BT02	● 400W	40000-40500LM	N	485x385x66mm
LPFL-500BT02	● 500W	50000-50500LM	N	485x385x66mm

Material

High Quality Aviation Aluminum

Color Temperature





BF SERIES LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-50BF01	● 50W	4000-4050LM	N	140X160X46mm
LPFL-100BF01	● 100W	8000-8050LM	N	220X202X51mm
LPFL-50BF01-CCT	● 50W	4000-4050LM	N	140X160X46mm
LPFL-100BF01-CCT	● 100W	8000-8050LM	N	220X202X51mm

Color Temperature



BS SERIES LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10BS01	● 10W	1000-1080LM	N	117X31X107mm
LPFL-20BS01	● 20W	2000-2080LM	N	117X31X107mm
LPFL-30BS01	● 30W	3000-3080LM	N	156X144X33mm
LPFL-50BS01	● 50W	5000-5080LM	N	199X36X160mm
LPFL-70BS01	● 70W	7000-5080LM	N	255X50X240mm
LPFL-100BS01	● 100W	10000-10500LM	N	331X50X280mm
LPFL-150BS01	● 150W	15000-15500LM	N	331X62X280mm
LPFL-200BS01	● 200W	20000-20500LM	N	331X88X280mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10BS01-G	● 10W	1000-1080LM	N	167X55X107mm
LPFL-20BS01-G	● 20W	2000-2080LM	N	167X55X107mm
LPFL-30BS01-G	● 30W	3000-3080LM	N	202X56X156mm
LPFL-50BS01-G	● 50W	5000-5080LM	N	225X60X198mm

Color Temperature



XT SERIES
LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10XT01	● 10W	1000-1080LM	N	105X30X100mm
LPFL-20XT01	● 20W	2000-2080LM	N	124X30X114mm
LPFL-30XT01	● 30W	3000-3080LM	N	154X32X138mm
LPFL-50XT01	● 50W	5000-5080LM	N	205X32X175mm




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-100XT01	● 100W	10000-10500LM	N	280X34X258mm
LPFL-150XT01	● 150W	15000-15500LM	N	320X38X280mm

Material

High Quality Aviation
Aluminum

Color Temperature



X SERIES
LED FLOOD LIGHT






X SERIES LED FLOOD LIGHT

IP66



200W

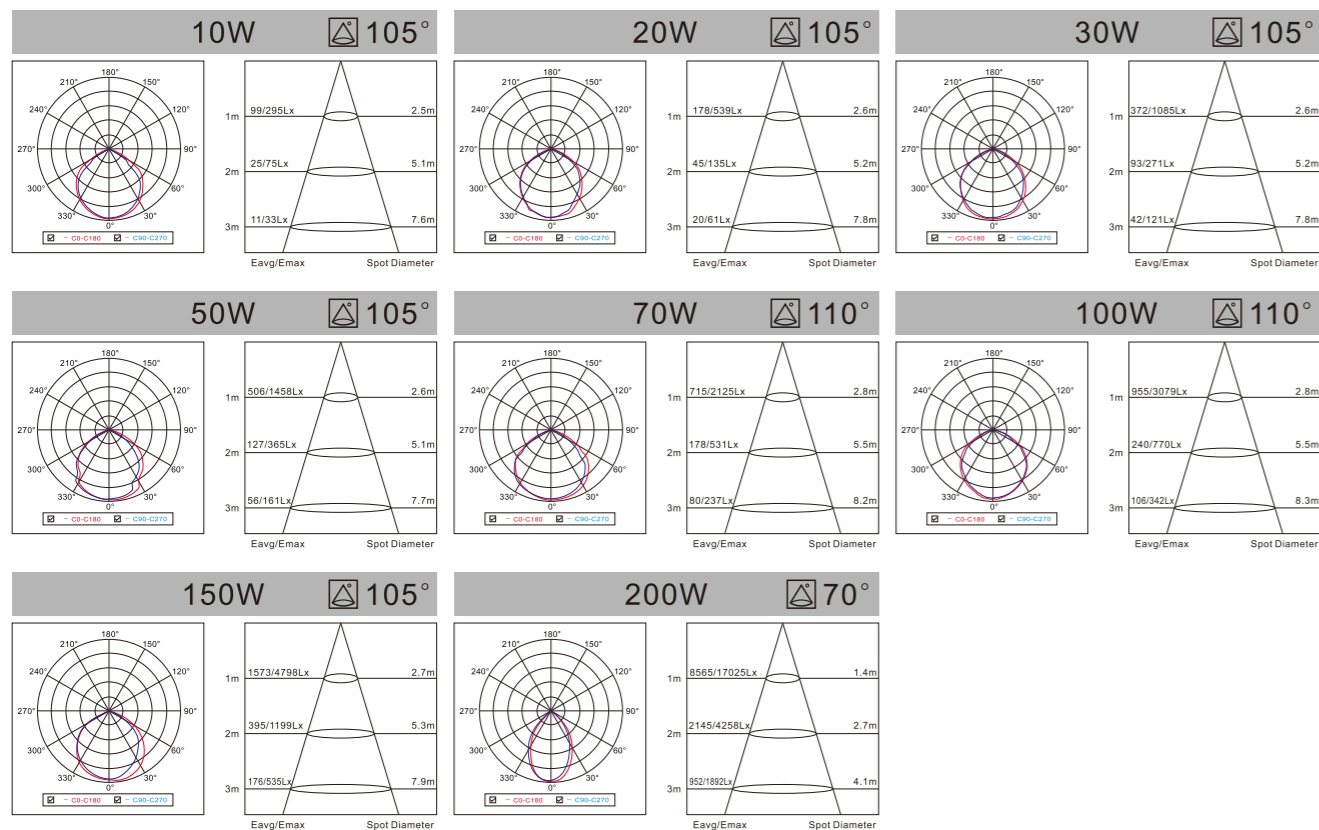

Material
High Quality Aviation Aluminum

Color Temperature
 Warm White
 Cool White
 Natural White

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10X01	● 10W	890-950LM	N	137X32X118mm
LPFL-20X01	● 20W	1720-1810LM	N	180X37X187mm
LPFL-30X01	● 30W	2650-2730LM	N	193X37X197mm
LPFL-50X01	● 50W	4120-4200LM	N	258X42X257mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-100X01	● 100W	9150-9350LM	N	261X59X268mm
LPFL-150X01	● 150W	14100-14380LM	N	285X65X285mm
LPFL-200X01	● 200W	18800-19200LM	N	345X70X370mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-200X01	● 200W	20000-21000LM	N	345X110X375mm
LPFL-400X01	● 400W	40000-41000LM	N	405X105X430mm

 M SERIES
LED FLOOD LIGHT



LED
FLOOD LIGHT



M SERIES LED FLOOD LIGHT




LED FLOOD LIGHT
Long Lifetime High Lumen Efficiency High CRI
Good Heat Dissipation No Radiation Energy Saving **IP66**
50W/100W/150W/200W/250W/400W/500W/600W

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-50M01	● 50W	4980-5120LM	N	295X70X138mm
LPFL-100M01	● 100W	10560-11380LM	N	295X70X268mm
LPFL-150M01	● 150W	14800-15500LM	N	298X73X378mm
LPFL-200M01	● 200W	20800-21500LM	N	298X73X490mm

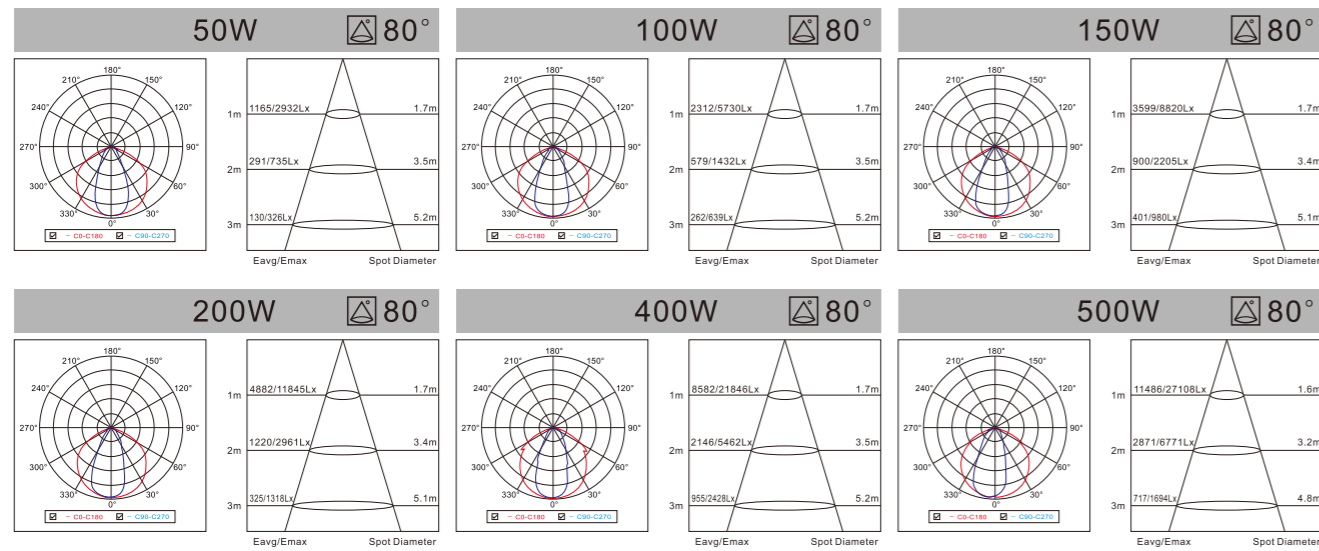

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-300M01	● 300W	28900-29600LM	N	573X73X378mm
LPFL-400M01	● 400W	39500-40200LM	N	573X73X490mm
LPFL-500M01	● 500W	48600-49700LM	N	573X73X600mm
LPFL-600M01	● 600W	58800-59500LM	N	573X73X710mm



Material
High Quality Aviation Aluminum

Color Temperature
Warm White
Cool White
Natural White





A SERIES LED GRASS LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPGSL-07A01-Y	● 7W	525-595LM	N	70X90mm

Color Temperature



HW SERIES LED WORK LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Verdunklung DIM	Produktgröße Product Size
LPWK-100HW01	● 100W	3.7V/4400mAh	N	340x282x70mm
LPWK-200HW01	● 200W	3.7V/8800mAh	N	400x312x70mm

Color Temperature





**G SERIES
LED STREET LIGHT**



LED STREET LIGHT



AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50G01	● 50W	5130-6270LM	N	395x108x47mm	∅ 50/60mm
LPSTL-100G01	● 100W	10260-12540LM	N	458x120x49mm	∅ 50/60mm
LPSTL-150G01	● 150W	15390-18810LM	N	563x159x62mm	∅ 50/60mm
LPSTL-200G01	● 200W	20520-25080LM	N	650x173x62mm	∅ 50/60mm

Material
High Quality Aviation
Aluminum

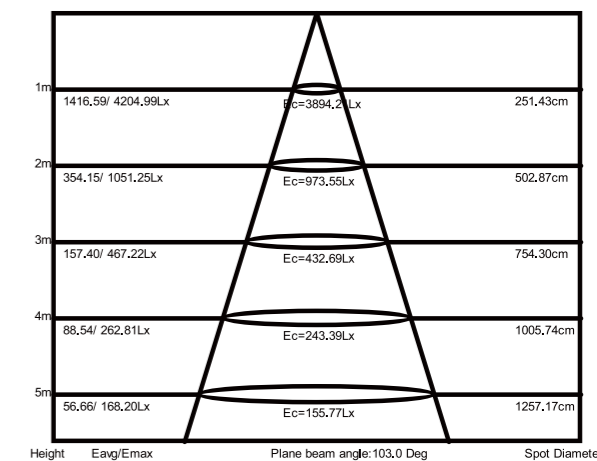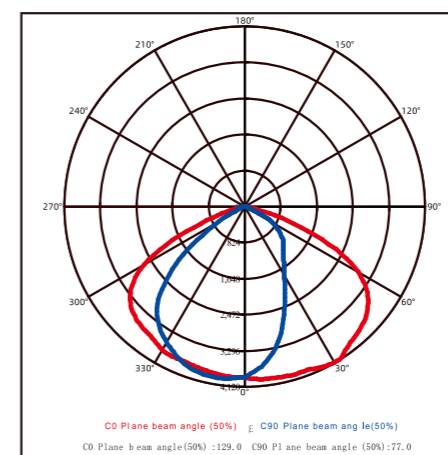

Color Temperature





C SERIES LED STREET LIGHT





LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h



IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-20C01	● 20W	1900-2200LM	N	282X55X144mm	∅ 50mm
LPSTL-30C01	● 30W	2850-3300LM	N	282X55X144mm	∅ 50mm
LPSTL-50C01	● 50W	4750-5500LM	N	383X67X190mm	∅ 50mm
LPSTL-100C01	● 100W	9500-11000LM	N	490X85X225mm	∅ 50/60mm
LPSTL-100C01-G	● 100W	9500-11000LM	N	490X158X225mm	∅ 50/60mm
LPSTL-150C01	● 150W	14250-16500LM	N	600X95X272mm	∅ 50/60mm
LPSTL-200C01	● 200W	19000-22000LM	N	643X120X293mm	∅ 50/60mm

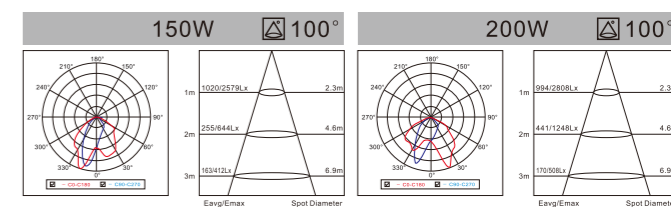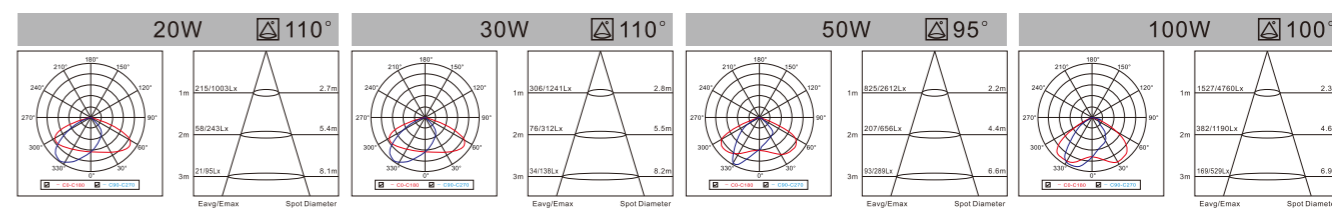

- Material**
High Quality Aviation Aluminum
- Color Temperature**
- Warm White
 - Cool White
 - Natural White

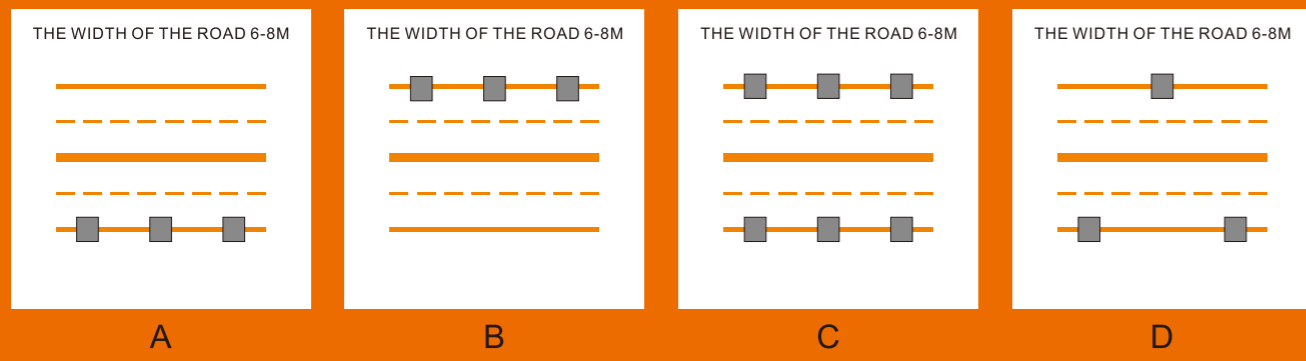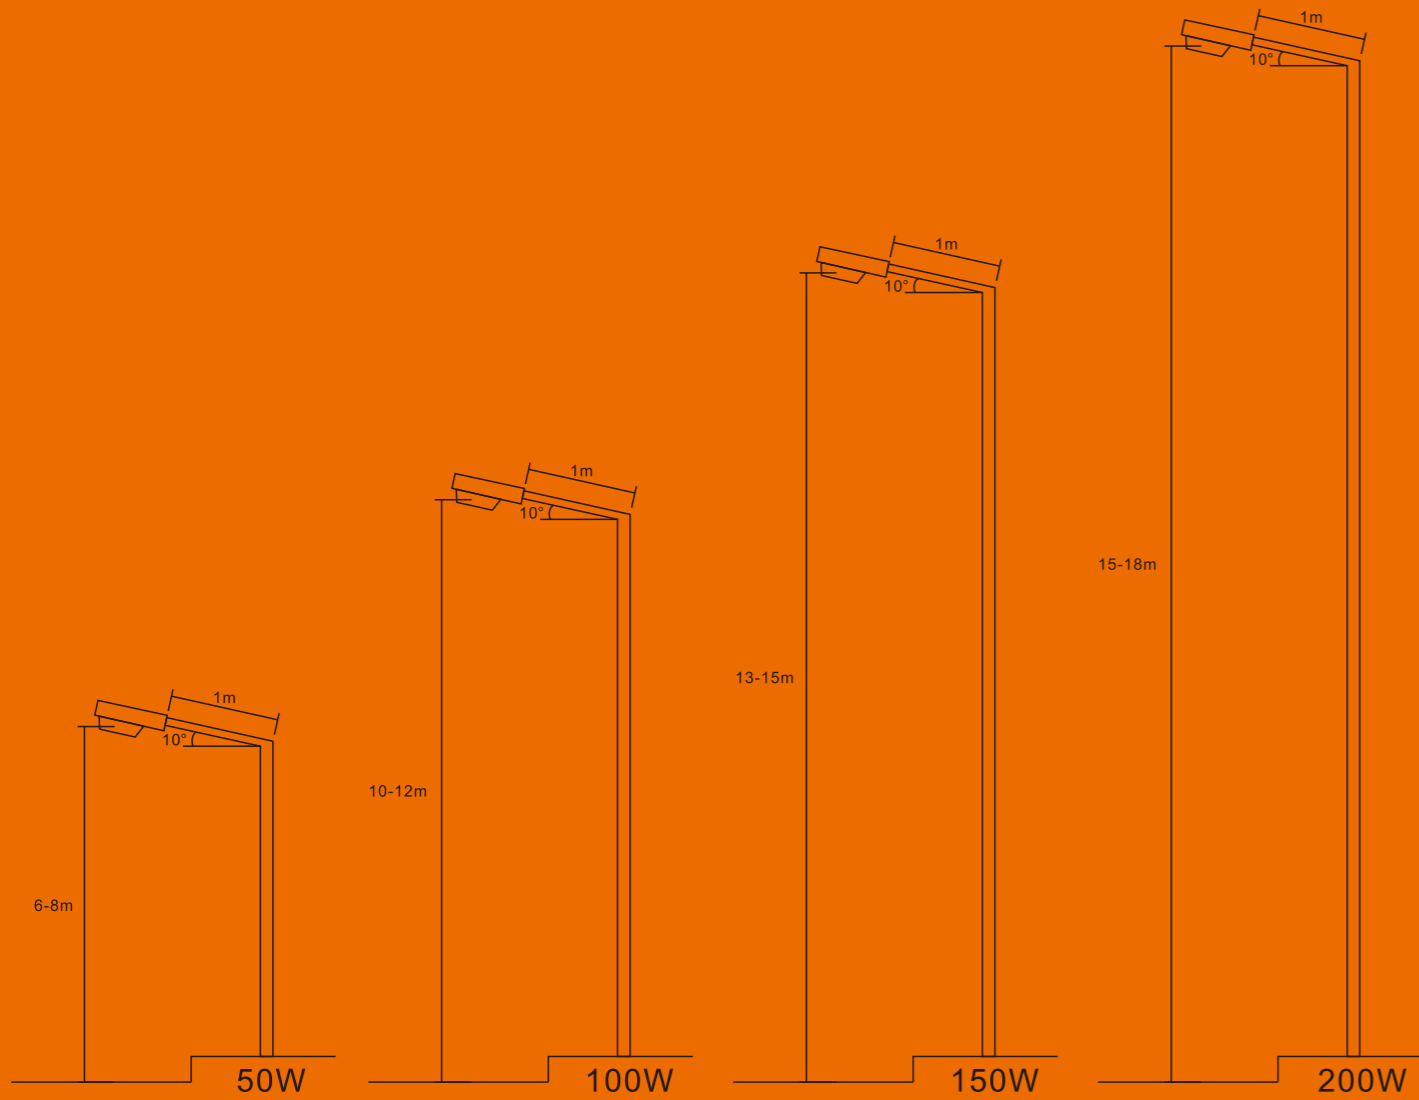




	RECOMMENDED SPACING OF STREET LIGHTS				ROAD REFERENCE DATASHEET				
	A	B	C	D	Lm(cd/m ²)	U ₀	U ₁	TI [%]	EIR
50W	18-21m	18-21m	30-36m	32-38m	≥0.75	≥0.40	≥0.60	≤15	≥0.30
100W	30-36m	30-36m	52-68m	57-63m					
150W	42-48m	42-48m	57-63m	57-63m					
200W	45-51m	45-51m	57-63m	57-63m					

LED STREET LIGHT AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50A01	● 50W	3800-4360LM	N	373X80X300mm	∅ 50/60mm
LPSTL-100A01	● 100W	9200-9560LM	N	565X80X300mm	∅ 50/60mm
LPSTL-150A01	● 150W	12600-13350LM	N	757X80X300mm	∅ 50/60mm
LPSTL-200A01	● 200W	17500-18200LM	N	950X80X300mm	∅ 50/60mm

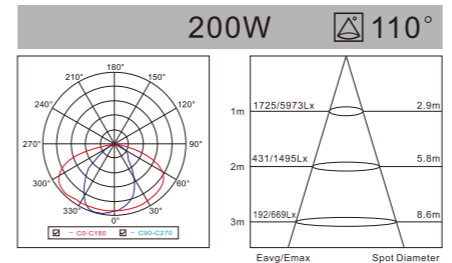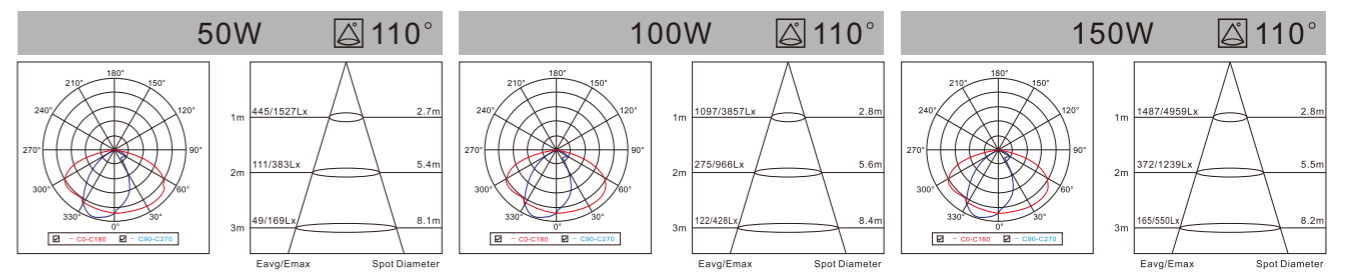



DSERIES LED STREET LIGHT

LED SOLAR LIGHT

CRI ≥ 80 H ≥ 20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-400D01-Y	● 400W	80Ah	1050×390×88	LFP Battery



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-200E01-Y	● 200W	6000mAh	360x181x48	LFP Battery

Color Temperature



ES SERIES LED STREET LIGHT

LED SOLAR LIGHT

CRI ≥ 80 H ≥ 20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-100ES01-SS	● 100W	5000mAh	310x207x47mm	LFP battery
LPSTL-200ES01-SS	● 200W	6000mAh	385x207x47mm	LFP battery
LPSTL-300ES01-SS	● 300W	10000mAh	460x220x47mm	LFP battery
LPSTL-400ES01-SS	● 400W	15000mAh	580x236x47mm	LFP battery
LPSTL-500ES01-SS	● 500W	24000mAh	658x236x47mm	LFP battery

Color Temperature






LED SOLAR LIGHT

CRI ≥ 80 H: 20000h

IP65



Modell Model	Leistung Power	Opladtid Charging Time	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-100D01	● 100W	4-6 Hours	15Ah	510X50X320mm	∅ 55-60mm	LFP Battery
LPSTL-200D01	● 200W	4-6 Hours	26Ah	510X50X320mm	∅ 55-60mm	LFP Battery

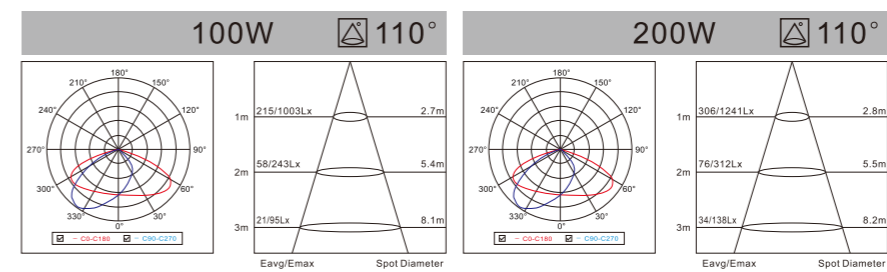

Color Temperature





**BS SERIES
LED STREET LIGHT**

LIPER MAKE THE WORLD MORE ENERGY SAVING!



100W/200W
SOLAR STREET LIGHT **IP65**

LED SOLAR LIGHT

CRI ≥ 80 H: 20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-100BS01-SS	100W	20Ah	670X350X590mm	Ø 50/60mm	LFP Battery
LPSTL-200BS01-SS	200W	30Ah	770X350X670mm	Ø 50/60mm	LFP Battery

Color Temperature





LED SOLAR LIGHT


CRI ≥ 80 H:20000h

Control Mode: lighting controlled intelligent controller

IP65



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-30BS01-SS	● 30W	6.5Ah	200X120X430mm	Ø 55mm	LFP Battery
LPSTL-60BS01-SS	● 60W	12Ah	450X125X450mm	Ø 55mm	LFP Battery
LPSTL-90BS01-SS	● 90W	16.5Ah	510X125X510mm	Ø 55mm	LFP Battery

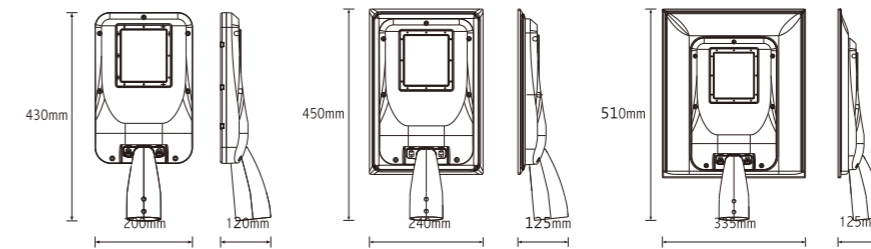

LED WALL LIGHT

CRI ≥ 80 H:20000h

Infrared Sensor



01:black 02:white


Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size
LPWL-20B01	● 20W	3.6Ah	164X118X40mm
LPWL-40B01	● 40W	5.4Ah	224X118X48mm
LPWL-20B02	● 20W	3.6Ah	164X118X40mm
LPWL-40B02	● 40W	5.4Ah	224X118X48mm

Color Temperature





HF SERIES

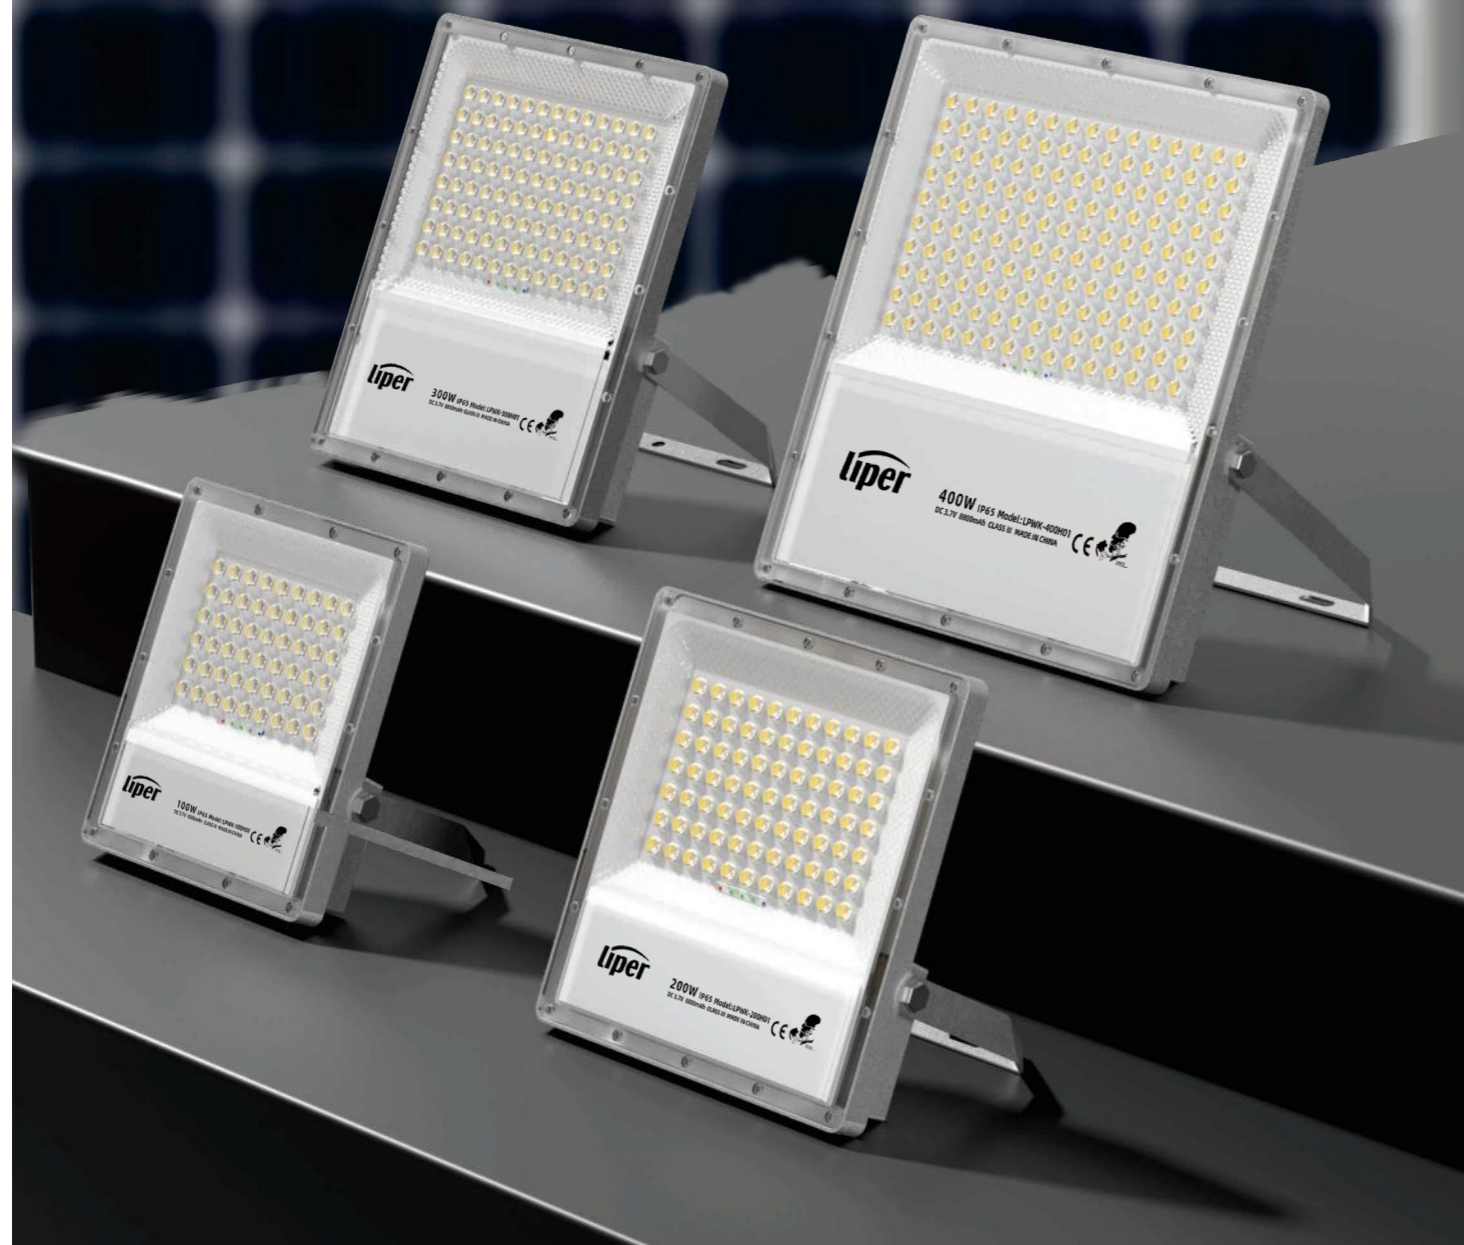

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HF01-SS	● 100W	6Ah	LFP Battery
LPFL-200HF01-SS	● 200W	12Ah	LFP Battery
LPFL-300HF01-SS	● 300W	18Ah	LFP Battery
LPFL-400HF01-SS	● 400W	24Ah	LFP Battery

Color Temperature



HW SERIES LED SOLAR LIGHT

LED SOLAR LIGHT

CRI ≥ 80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HW01-SS	● 100W	5AH	LFP battery
LPFL-200HW01-SS	● 200W	10AH	LFP battery
LPFL-300HW01-SS	● 300W	15AH	LFP battery
LPFL-400HW01-SS	● 400W	20AH	LFP battery



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HW02-SS	● 100W	5AH	LFP battery
LPFL-200HW02-SS	● 200W	10AH	LFP battery
LPFL-300HW02-SS	● 300W	15AH	LFP battery
LPFL-400HW02-SS	● 400W	20AH	LFP battery

Color Temperature





HW SERIES LED SOLAR LIGHT

LED SOLAR LIGHT

CRI ≥ 80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HW03-SS	● 100W	5AH	LFP battery
LPFL-200HW03-SS	● 200W	10AH	LFP battery
LPFL-300HW03-SS	● 300W	15AH	LFP battery
LPFL-400HW03-SS	● 400W	20AH	LFP battery

MT SERIES LED SOLAR LIGHT



YS: white YSB:black

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPDL-30MT01-YS	● 30W	3.2V 5.4Ah	LFP Battery
LPDL-30MT01-YSB	● 30W	3.2V 5.4Ah	LFP Battery

Color Temperature



C SERIES LED SOLAR LIGHT

LED SOLAR LIGHT

CRI ≥ 80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPWL-100C01	● 100W	3.2V 2.2Ah	LFP Battery
LPWL-200C01	● 200W	3.2V 4.4Ah	LFP Battery

Infrared Sensor



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100C01-G	● 100W	3.7V 2.2Ah	LFP Battery
LPFL-200C01-G	● 200W	3.7V 2.2Ah	LFP Battery

Color Temperature





Mobile Charge

Multi-functional solar system

30W/40W

20h 15h 9h 6h

LED SOLAR LIGHT

CRI ≥ 80 H:20000h



01:black 02:white

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LP-MS30A01	● 30W	6Ah	LFP Battery
LP-MS40A01	● 40W	12Ah	LFP Battery
LP-MS30A02	● 30W	6Ah	LFP Battery
LP-MS40A02	● 40W	12Ah	LFP Battery



Color Temperature

Warm White



Cool White




Natural White





FRESH LIGHT FOR SUPERMARKET

Ra>90(AVERAGE OF R1-R8)
R9>0(OBJECT MORE COLORFUL)

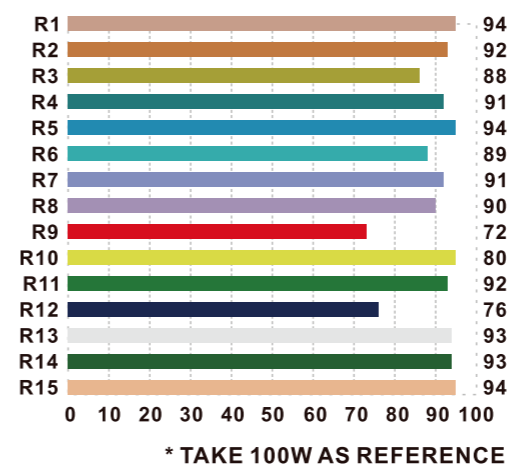




BS SERIES
LED UFO LIGHT



NEW
150W / 200W / 300W
IP65

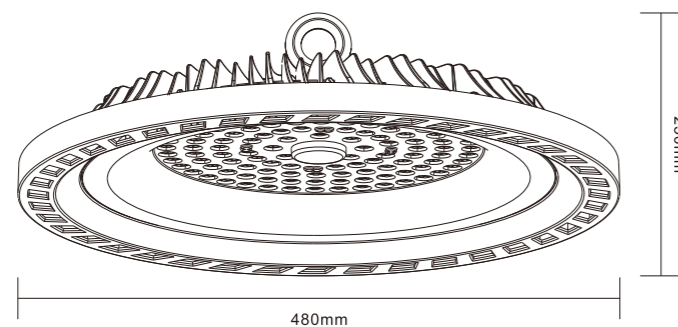

150W/200W/300W



BS/CS SERIES
LED UFO LIGHT

LED UFO LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-150BS01	● 150W	16500-20250LM	N	Ø 385X120mm
LPUF-200BS01	● 200W	22000-20250LM	N	Ø 385X120mm
LPUF-300BS01	● 300W	33000-40500LM	N	Ø 385X120mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-75CS01	● 75W	7500-8250LM	N	Ø 256X32mm
LPUF-100CS01	● 100W	10000-11000LM	N	Ø 296X32mm
LPUF-150CS01	● 150W	15000-16500LM	N	Ø 365X32mm

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White




Cool White



Natural White



NEW 20W / 40W / 60W
EYE PROTECTION LAMP

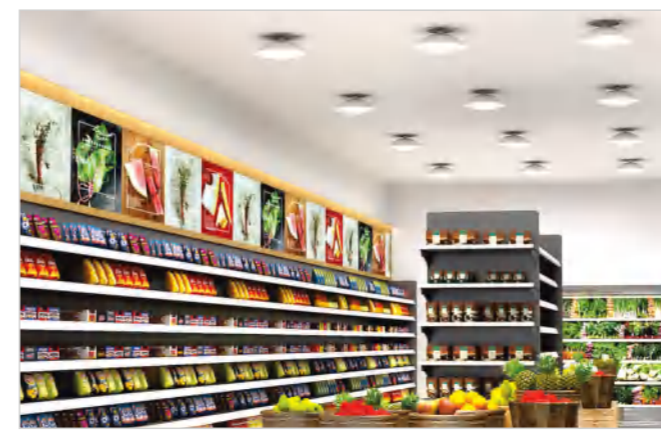



AS SERIES LED LAMP


LED LAMP AC:100/220-240V CRI≥80 H:30000h




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPUF-20AS-02	● 20W	1750-1850LM	N	∅ 130X70mm	E27/B22
LPUF-40AS-02	● 40W	3750-3850LM	N	∅ 190X103mm	E27/B22
LPUF-60AS-02	● 60W	5750-5850LM	N	∅ 255X130mm	E27/B22



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPUF-20AS-01	● 20W	1750-1850LM	N	∅ 130X70mm	E27/B22
LPUF-40AS-01	● 40W	3750-3850LM	N	∅ 190X103mm	E27/B22
LPUF-60AS-01	● 60W	5750-5850LM	N	∅ 255X130mm	E27/B22

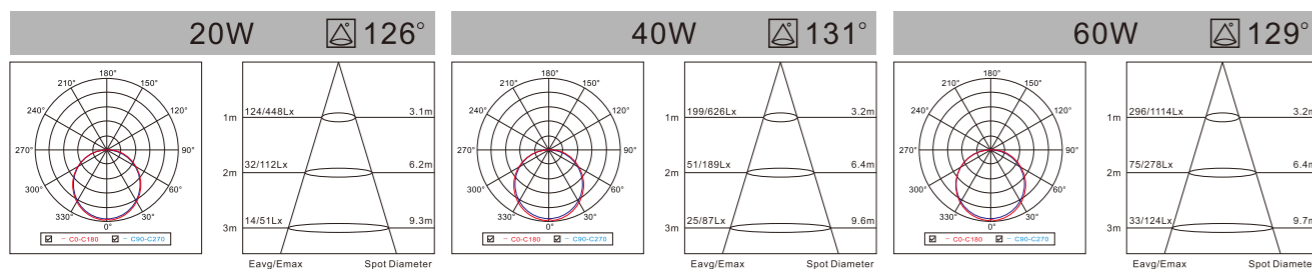

Color Temperature

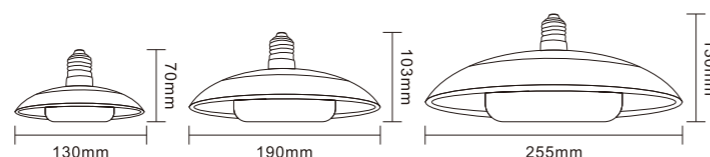

D/ES SERIES LED LAMP

LED LAMP AC:100/220-240V CRI≥80 H:20000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPQP5DLED-01	● 5W	430-470LM	N	∅ 60X106mm	E27/B22
LPQP7DLED-01	● 7W	600-660LM	N	∅ 60X106mm	E27/B22
LPQP9DLED-01	● 9W	770-860LM	N	∅ 60X108mm	E27/B22
LPQP12DLED-01	● 12W	1005-1105LM	N	∅ 60X110mm	E27/B22
LPQP15DLED-01	● 15W	1235-1365LM	N	∅ 70X124mm	E27/B22
LPQP18DLED-01	● 18W	1520-1680LM	N	∅ 80X145mm	E27/B22
LPQP20DLED-01	● 20W	1710-1890LM	N	∅ 80X145mm	E27/B22



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPQP20ES-01	● 20W	1900-2100LM	N	∅ 80X150mm	E27/B22
LPQP30ES-01	● 30W	2850-3150LM	N	∅ 100X185mm	E27/B22
LPQP40ES-01	● 40W	3610-3990LM	N	∅ 120X210mm	E27/B22
LPQP50ES-01	● 50W	4275-4725LM	N	∅ 138X240mm	E27/B22

Color Temperature





A SERIES LED STEP LIGHT

LED STEP LIGHT AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	IP IP	Produktgröße Product Size
LPWL-07A01-Y	7W	595-640LM	65	∅228x81x30mm
LPWL-07A01YCCT	7W	595-640LM	65	∅228x81x30mm




IP65

Color Temperature



A SERIES LED STEP LIGHT

LED STEP LIGHT AC:100/220-240V CRI≥80 H:30000h

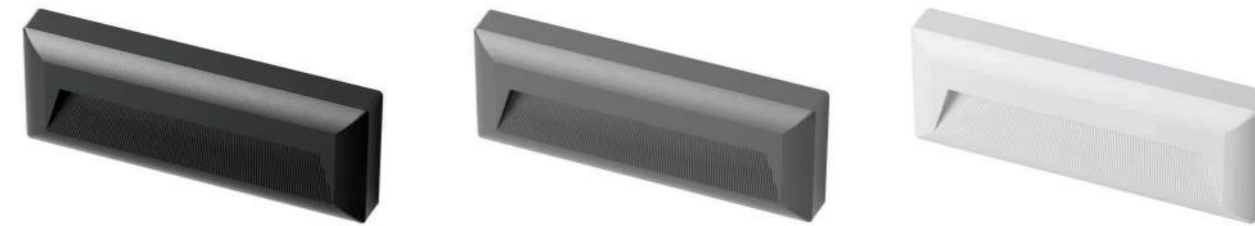


Modell Model	Leistung Power	Lumen Lumen	IP IP	Produktgröße Product Size
LPWL-05A01-Y	5W	425-510LM	65	∅228x85x30mm
LPWL-05A01YCCT	5W	425-510LM	65	∅228x85x30mm



IP65

Color Temperature







C SERIES LED WALL LIGHT

LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h

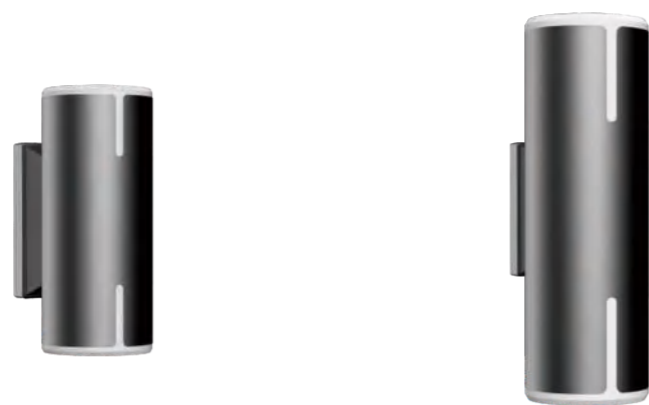

Modell Model	Leistung Power	Lumen Lumen	DIM DIM	Produktgröße Product Size
LPWL-08C01-Y	● 8W	440-480LM	N	Ø 70X165mm
LPWL-12C01-Y	● 12W	660-720LM	N	Ø 90X275mm

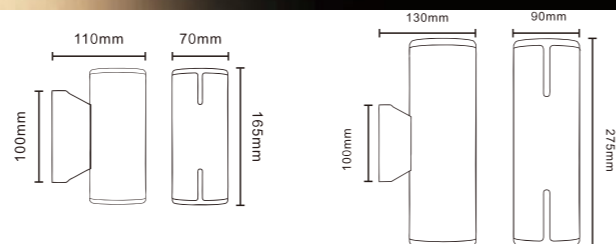

Color Temperature




C SERIES LED WALL LIGHT

LED WALL LIGHT


AC:100/220-240V CRI≥80 H:30000h





Modell Model	Leistung Power	Lumen Lumen	DIM DIM	Produktgröße Product Size
LPWL-10C01-Y	● 10W	550-600LM	N	Ø 80X230mm

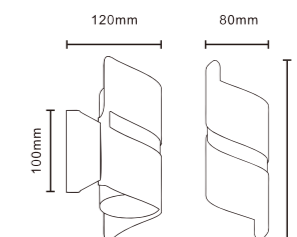

Color Temperature






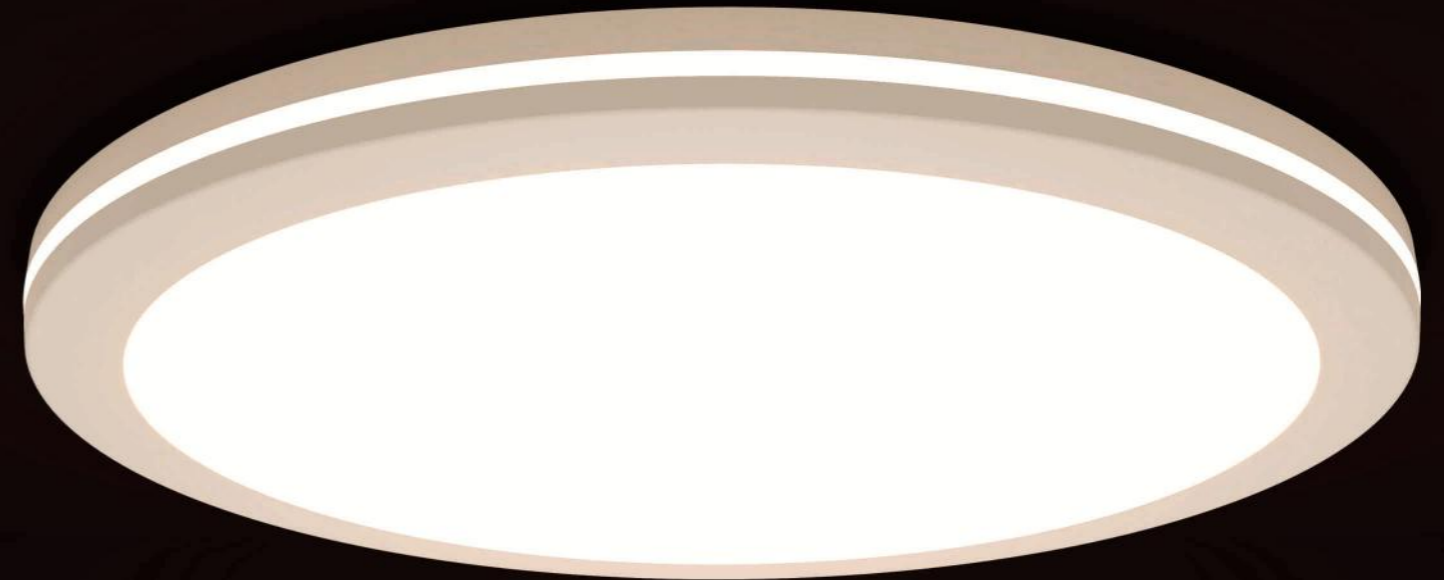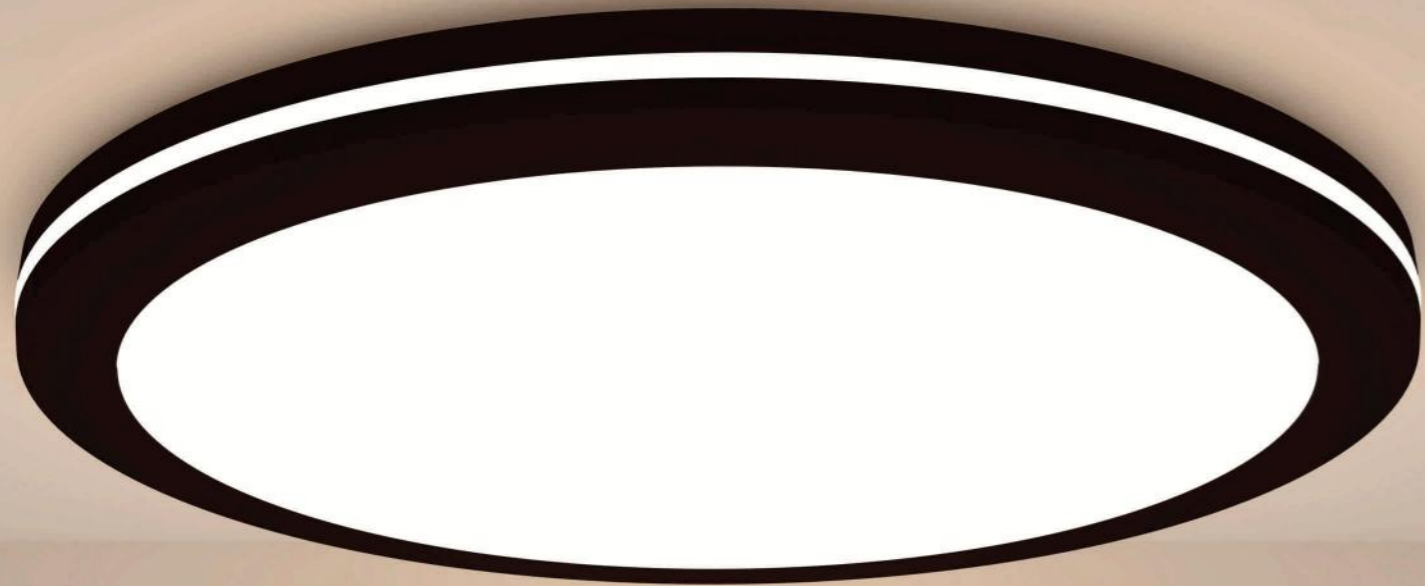

IP65 Anti-insect



IP65 Anti-insect

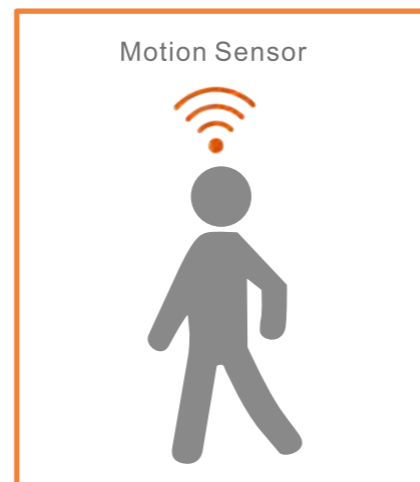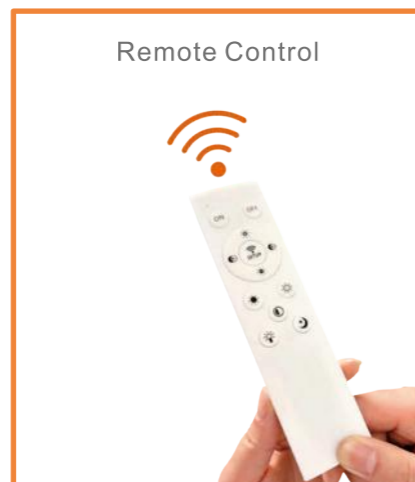
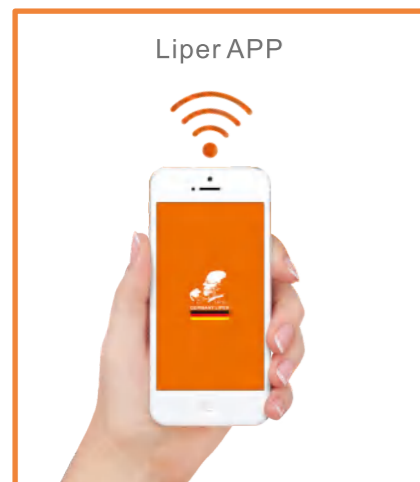


IP65 DOWN LIGHT


AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MA01-Y	● 20W	1600-1700LM	N	∅ 182X48mm
LP-DL30MA01-Y	● 30W	2400-2500LM	N	∅ 235X52mm
LP-DL40MA01-Y	● 40W	3200-3300LM	N	∅ 292X55mm
LP-DL50MA01-Y	● 50W	5000-5100LM	N	∅ 380X55mm
LP-DL60MA01-Y	● 60W	5130-5670LM	N	∅ 495X53mm
LP-DL20MA01-YG(SENSOR)	● 20W	1600-1700LM	N	∅ 182X48mm
LP-DL30MA01-YG(SENSOR)	● 30W	2400-2500LM	N	∅ 235X52mm

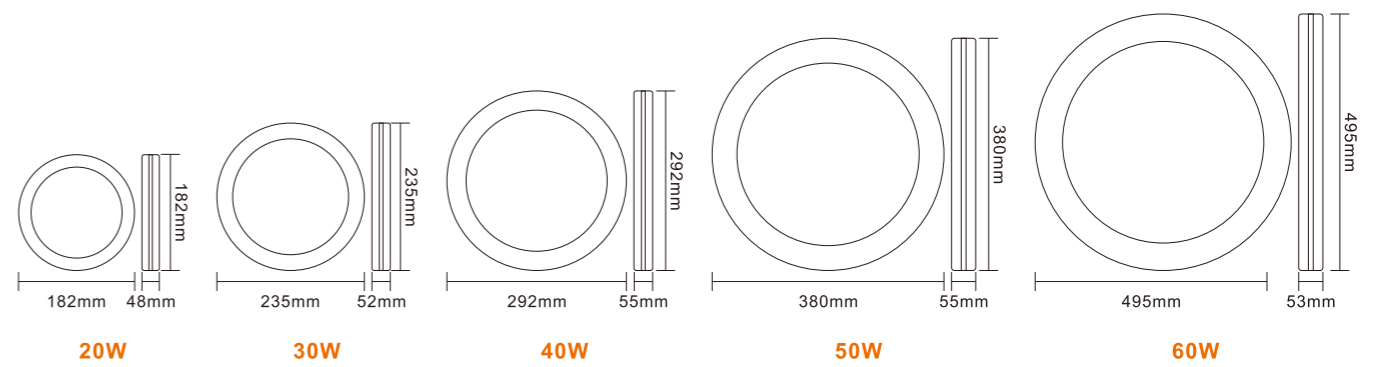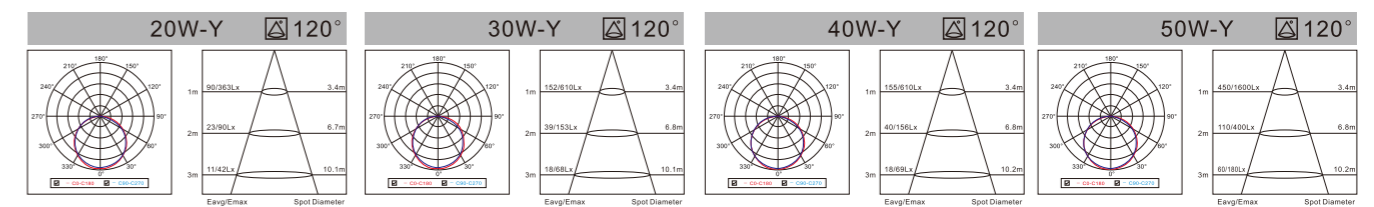

Color Temperature







IP65 DOWN LIGHT


AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL30MA01-F	● 30W	2400-2500LM	N	215X57X215mm
LP-DL40MA01-F	● 40W	3200-3300LM	N	265X55X265mm
LP-DL30MA01-FG(SENSOR)	● 30W	2400-2500LM	N	215X48X215mm
LP-DL40MA01-FG(SENSOR)	● 40W	3200-3300LM	N	265X55X265mm

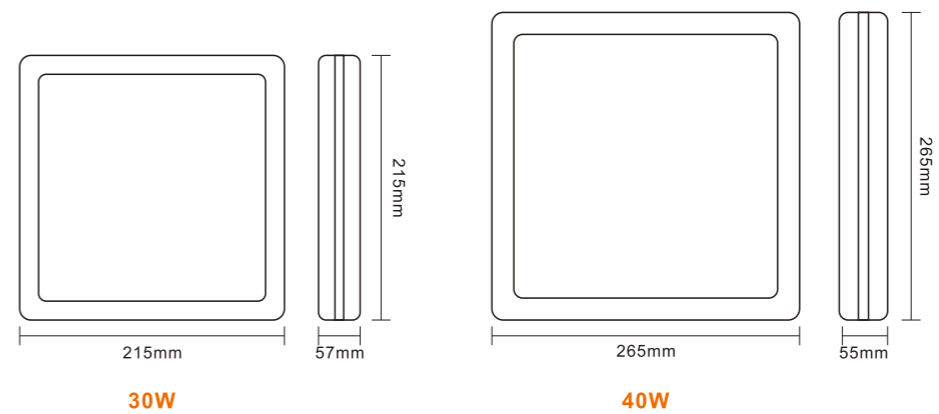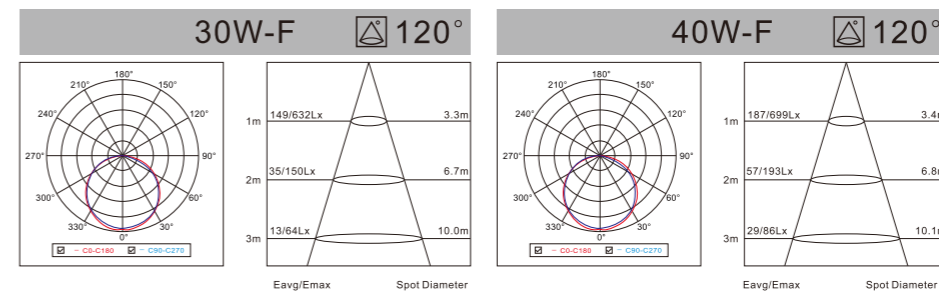

Color Temperature



IP65 Anti-insect






MT SERIES LED DOWN LIGHT



20W / 30W IP65
Diamond Downlight

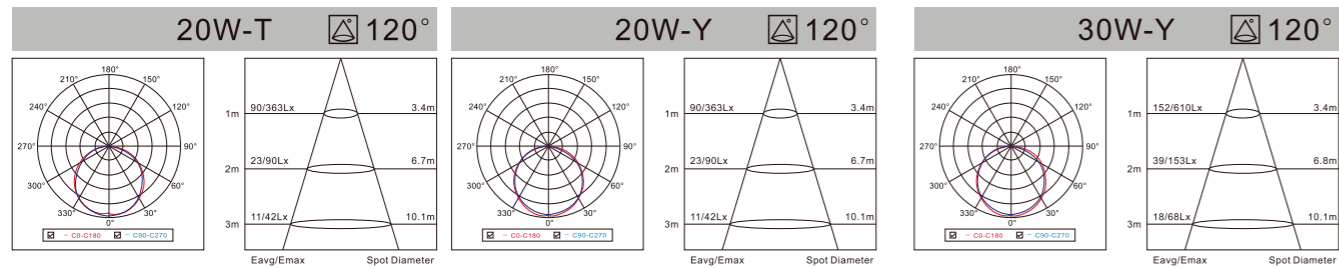

LED WATERPROOF DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h




T/Y: white TH/YH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MT01-T	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT01-Y	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT01-Y	● 30W	2700-2800LM	N	∅256X76mm
LP-DL20MT01-TH	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT01-YH	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT01-YH	● 30W	2700-2800LM	N	∅256X76mm



T/Y: white TH/YH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MT02-T	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT02-Y	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT02-Y	● 30W	2700-2800LM	N	∅256X76mm
LP-DL20MT02-TH	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT02-YH	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT02-YH	● 30W	2700-2800LM	N	∅256X76mm

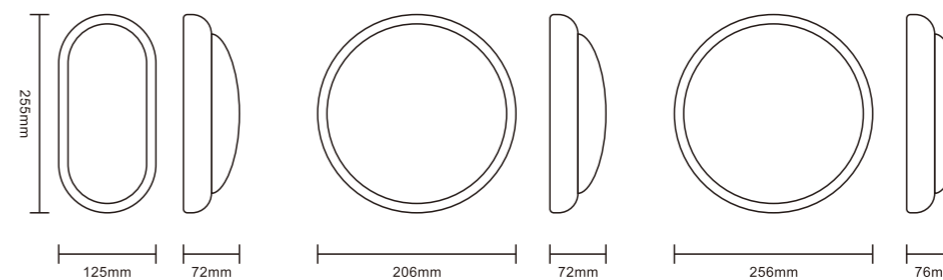

Color Temperature






LED WATERPROOF DOWN LIGHT


AC:100/220-240V CRI≥80 H:30000h



F: white FH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL30MT02-F	● 30W	2755-3045LM	N	205X60X205mm
LP-DL40MT02-F	● 40W	3610-3990LM	N	260X60X260mm
LP-DL30MT02-FH	● 30W	2755-3045LM	N	205X60X205mm
LP-DL40MT02-FH	● 40W	3610-3990LM	N	260X60X260mm

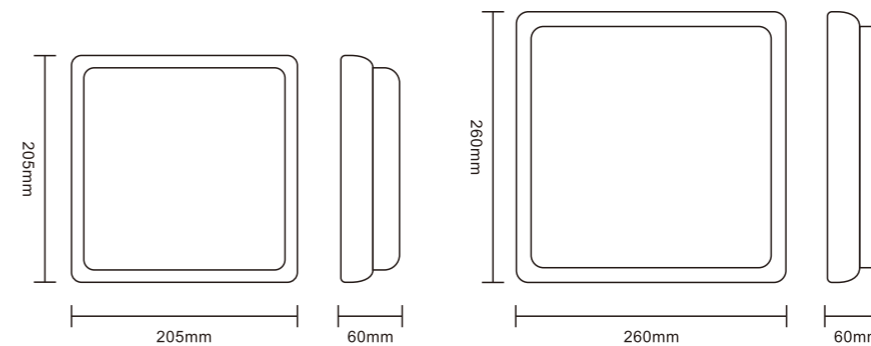



WITH SENSOR

Advised installation height : 3-5m
Max detection distance : 10m
It will turn off after people leave induction zone for 90s

Color Temperature







LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h






T : white TB : black

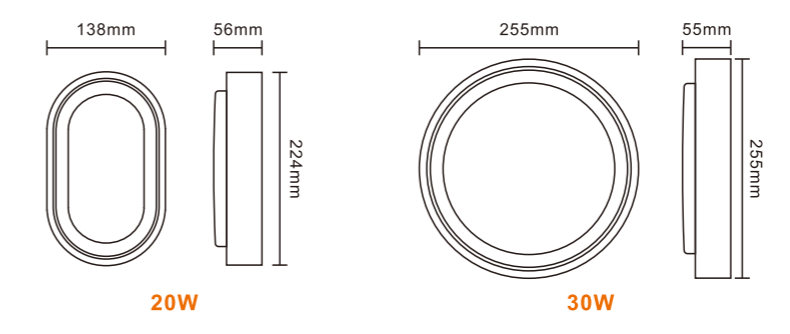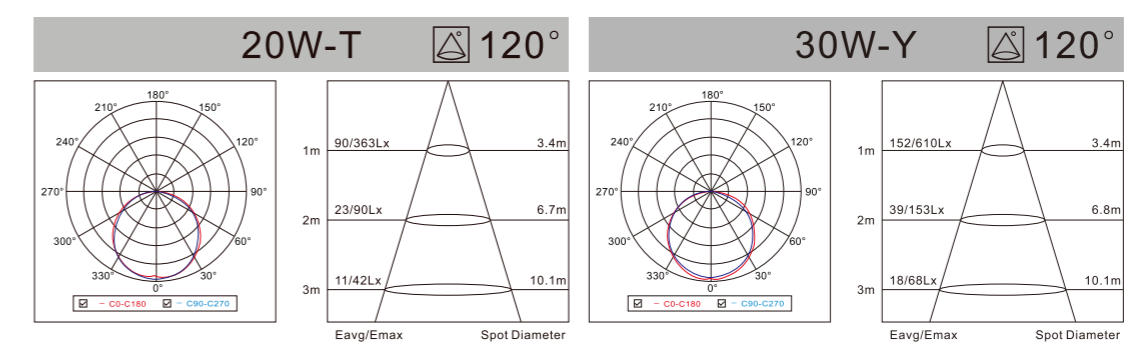Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MF01-T	● 20W	1710-1890LM	N	224X56X138
LP-DL30MF01-Y	● 30W	2570-2840LM	N	255X55X255
LP-DL20MF01-TB	● 20W	1710-1890LM	N	224X56X138
LP-DL30MF01-YB	● 30W	2570-2840LM	N	255X55X255



Material
High Quality Aviation Aluminum

Color Temperature
 Warm White  Cool White  Natural White 



**MS SERIES
LED DOWN LIGHT**



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h


IP65





Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-25MS01-Y	● 25W	2125-2250LM	N	Ø 215X65mm
LPDL-35MS01-Y	● 35W	2975-3150LM	N	Ø 282X77mm
LPDL-45MS01-Y	● 45W	3825-4050LM	N	Ø 330X86mm
LPDL-25MS01-YCCT	● 25W	2125-2250LM	N	Ø 215X65mm
LPDL-35MS01-YCCT	● 35W	2975-3150LM	N	Ø 282X77mm
LPDL-45MS01-YCCT	● 45W	3825-4050LM	N	Ø 330X86mm



Color Temperature




MF SERIES
LED WALL LIGHT
IP65

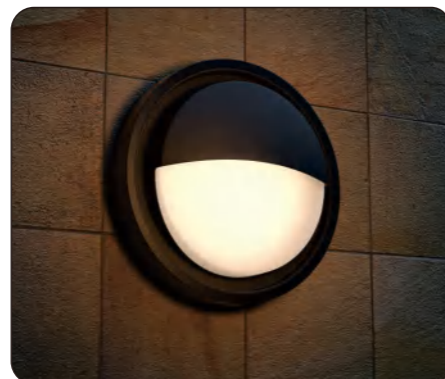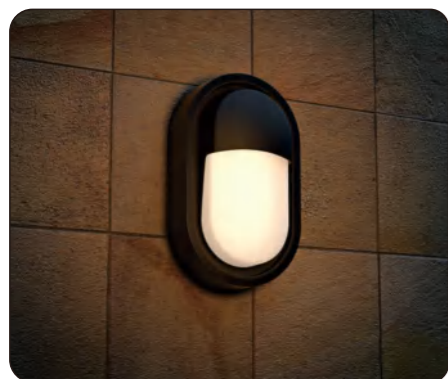


Radar Sensor
Lux: <25lux
Sensing Distance: 5-8meter
Time-Delay: 90s

LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h

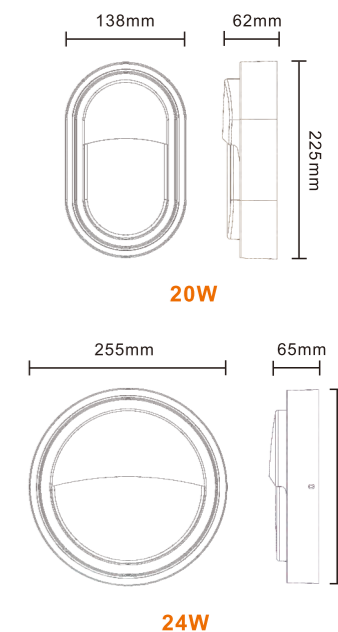

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MF01-TB-C	● 20W	1800LM	N	225X138X62
LP-DL20MF01-TB-CG(SENSOR)	● 20W	1800LM	N	225X138X62
LP-DL24MF01-YB-C	● 24W	2160LM	N	255X65X25.5
LP-DL24MF01-YB-CG(SENSOR)	● 24W	2160LM	N	255X65X25.5

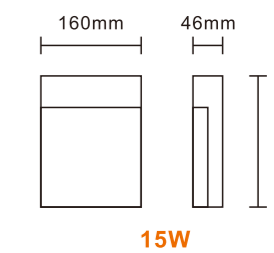


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-15MF01-F-C	● 15W	1275-1315LM	N	198X160X46mm

Material

High Quality Aviation
Aluminum

Color Temperature





MW SERIES LED DOWN LIGHT

LED DOWN LIGHT



AC:100/220-240V CRI≥80 H:30000h

IP44





Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-40MW01-Y	● 40W	3600LM	N	∅400X20mm
LPDL-50MW01-Y	● 50W	4500LM	N	∅500X20mm


40W-Y 120°

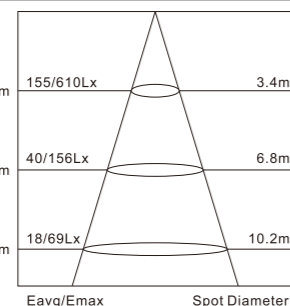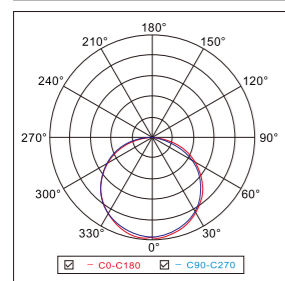

50W-Y 120°

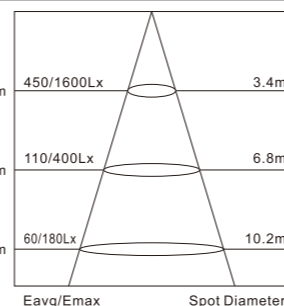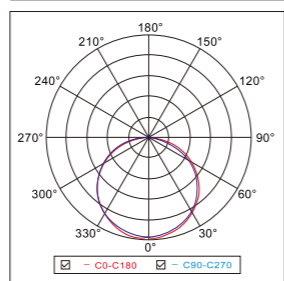

ALL IN ONE



Color Temperature



EMS SERIES LED DOWN LIGHT


LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-06EMS01-Y	● 6W	378-462LM	N	∅ 110x39mm
LPDL-12EMS01-Y	● 12W	864-1056LM	N	∅ 172x39mm
LPDL-18EMS01-Y	● 18W	1296-1584LM	N	∅ 222x39mm
LPDL-24EMS01-Y	● 24W	1836-2244LM	N	∅ 280x39mm

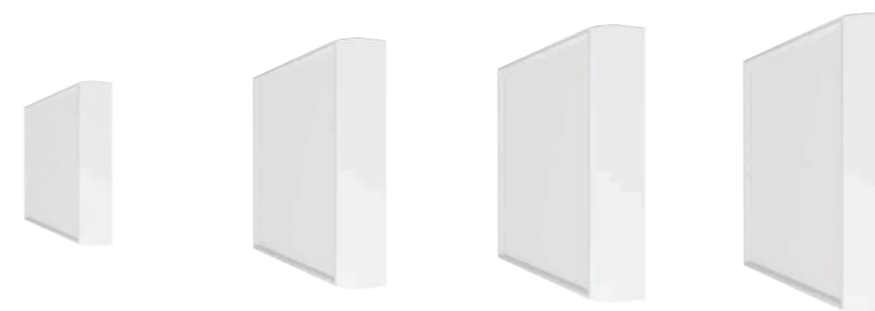

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-06EMS01-F	● 6W	378-462LM	N	110x37.5mm
LPDL-12EMS01-F	● 12W	864-1056LM	N	172x37.5mm
LPDL-18EMS01-F	● 18W	1296-1584LM	N	203x37.5mm
LPDL-24EMS01-F	● 24W	1836-2244LM	N	256x37.5mm

Color Temperature





A SERIES LED DOWNLIGHT

LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-10A01-Y	● 10W	850-935LM	N	Ø75X100mm
LPCL-15A01-Y	● 15W	1275-1360LM	N	Ø75X150mm
LPCL-20A01-Y	● 20W	1700-1785LM	N	Ø95X150mm
LPCL-30A01-Y	● 30W	2550-2635LM	N	Ø115X135mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-10A01-YB	● 10W	850-935LM	N	Ø75X100mm
LPCL-15A01-YB	● 15W	1275-1360LM	N	Ø75X150mm
LPCL-20A01-YB	● 20W	1700-1785LM	N	Ø95X150mm
LPCL-30A01-YB	● 30W	2550-2635LM	N	Ø115X135mm

Color Temperature



A SERIES LED DOWNLIGHT

LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h



IP44



Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-15A01-YR	● 15W	1275-1360LM	N	Ø85X88mm
LPCL-15A01-YRCCT	● 15W	1275-1360LM	N	Ø85X88mm
LPCL-15A01-YBR	● 15W	1275-1360LM	N	Ø85X88mm
LPCL-15A01-YBRCT	● 15W	1275-1360LM	N	Ø85X88mm

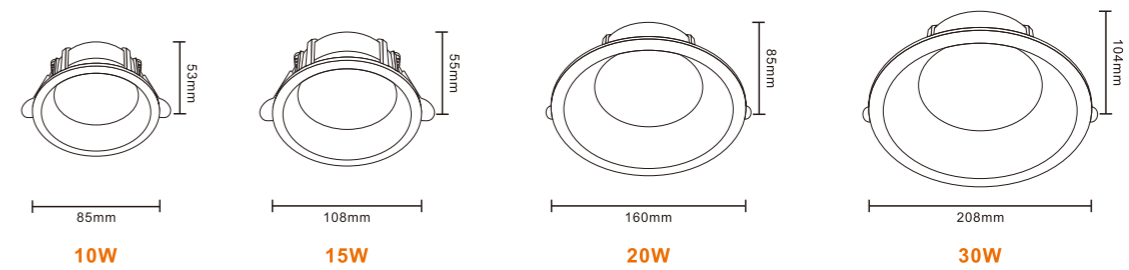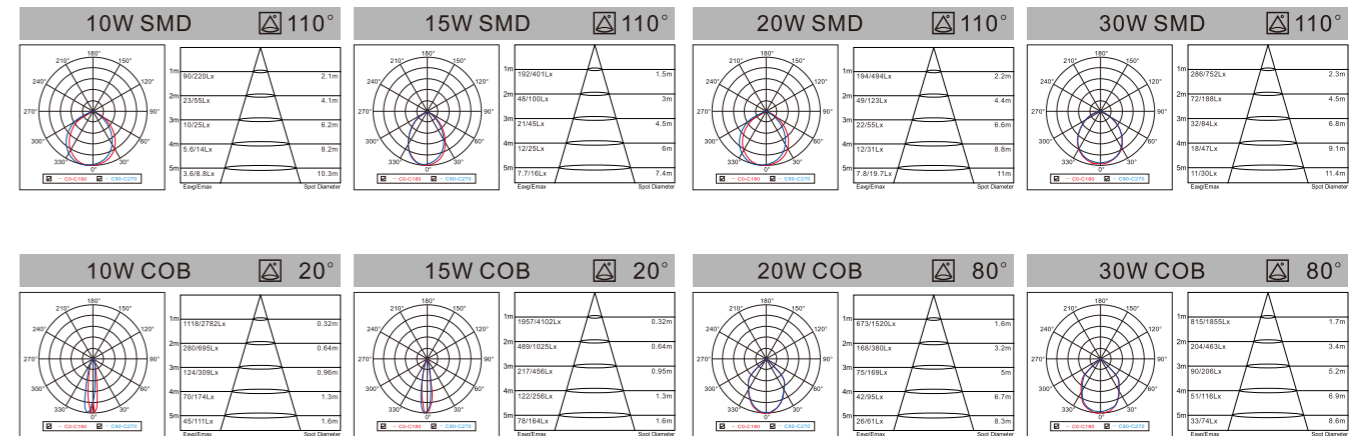


IP44


Material	Color Temperature			
High Quality Aviation Aluminum	Warm White	Cool White	Natural White	CCT Adjustable
				



G SERIES LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

COB



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G01-Y	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G01-Y	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G01-Y	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G01-Y	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G01-YB	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G01-YB	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G01-YB	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G01-YB	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm

Color Temperature



G SERIES LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

SMD




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G02-Y	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G02-Y	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G02-Y	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G02-Y	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G02-YB	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G02-YB	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G02-YB	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G02-YB	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm

Color Temperature





GS/GT SERIES LED DOWNLIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-10GS01-Y	● 10W	850-935LM	N	∅85X53mm	∅75-80mm
LPDL-15GS01-Y	● 15W	1275-1360LM	N	∅108X55mm	∅95-100mm
LPDL-10GS01-YB	● 10W	850-935LM	N	∅85X53mm	∅75-80mm
LPDL-15GS01-YB	● 15W	1275-1360LM	N	∅108X55mm	∅95-100mm




H SERIES LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

Pre-Embedded

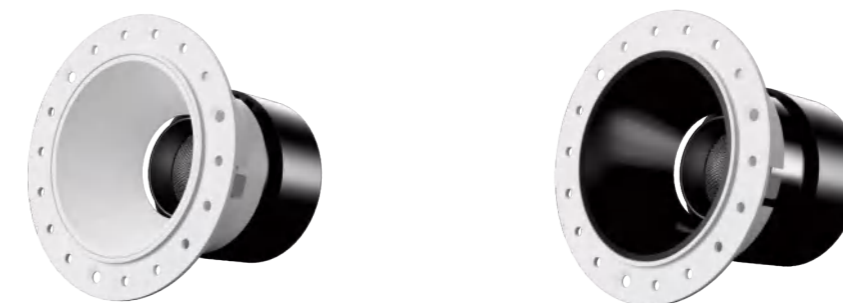

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCL-10H02-Y	● 10W	850-935LM	N	∅98X88mm	∅75-80mm
LPCL-10H02-YB	● 10W	850-935LM	N	∅98X88mm	∅75-80mm




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-5GT01-Y	● 5W	400-425LM	N	∅ 90X46mm	∅75-80mm
LPDL-7GT01-Y	● 7W	560-595LM	N	∅ 90X46mm	∅75-80mm
LPDL-10GT01-Y	● 10W	800-850LM	N	∅ 112X52mm	∅95-100mm

Color Temperature



Color Temperature



Y:white YB:black

 **EN SERIES**
LED DOWNLIGHT




IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10EN01-Y	● 10W	1000-1050LM	N	∅ 90x30mm	∅ 50-85mm
LP-DL18EN01-Y	● 18W	1800-1950LM	N	∅ 115x30mm	∅ 60-105mm
LP-DL24EN01-Y	● 24W	2400-2550LM	N	∅ 160x30mm	∅ 75-150mm
LP-DL36EN01-Y	● 36W	3600-3750LM	N	∅ 215x31mm	∅ 90-200mm

Color Temperature

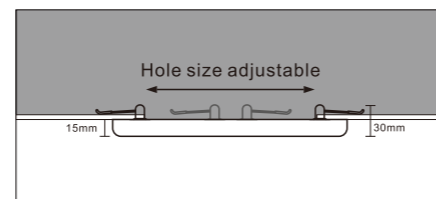

 **EM/EC SERIES**
LED DOWN LIGHT

LED DOWN LIGHT AC:100/220-240V CRI ≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL12EM01-Y	● 12W	880-1020LM	N	∅ 172x29mm
LP-DL18EM01-Y	● 18W	1450-1530LM	N	∅ 222x29mm
LP-DL24EM01-Y	● 24W	1920-2060LM	N	∅ 282x29mm

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL03EC01-Y	● 3W	210-240LM	N	∅ 85x25mm	∅ 40-75mm
LP-DL06EC01-Y	● 6W	430-510LM	N	∅ 116x25mm	∅ 55-105mm
LP-DL12EC01-Y	● 12W	880-1020LM	N	∅ 166x25mm	∅ 55-155mm
LP-DL18EC01-Y	● 18W	1450-1530LM	N	∅ 219x25mm	∅ 55-210mm

Color Temperature






LED DOWN LIGHT


AC:100/220-240V CRI≥80 H:30000h

IP44

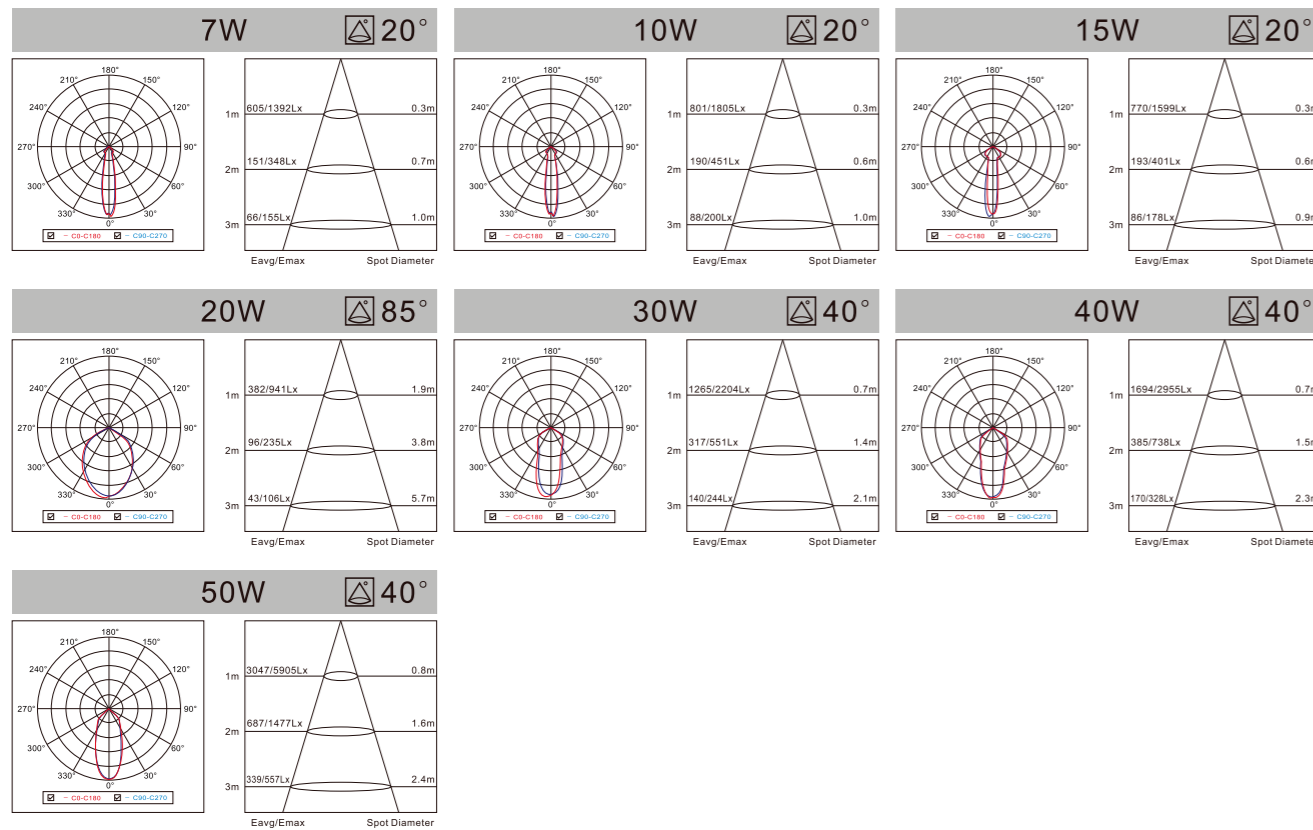

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB07BX01	7W	550-650LM	N	Ø 98x46mm	Ø 75-85mm
LP-COB10BX01	10W	850-950LM	N	Ø 115x47mm	Ø 95-105mm
LP-COB15BX01	15W	1350-1450LM	N	Ø 140x49mm	Ø 120-130mm

Material
High Quality Aviation Aluminum

Color Temperature
 Warm White 
 Cool White 
 Natural White 



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB20BX01	20W	1750-1900LM	N	Ø 160x50mm	Ø 130-150mm
LP-COB30BX01	30W	2550-2650LM	N	Ø 196x60mm	Ø 160-185mm
LP-COB40BX01	40W	3450-3550LM	N	Ø 225x70mm	Ø 180-215mm
LP-COB50BX01	50W	4350-4450LM	N	Ø 225x95mm	Ø 180-215mm




EW SERIES LED DOWN LIGHT



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

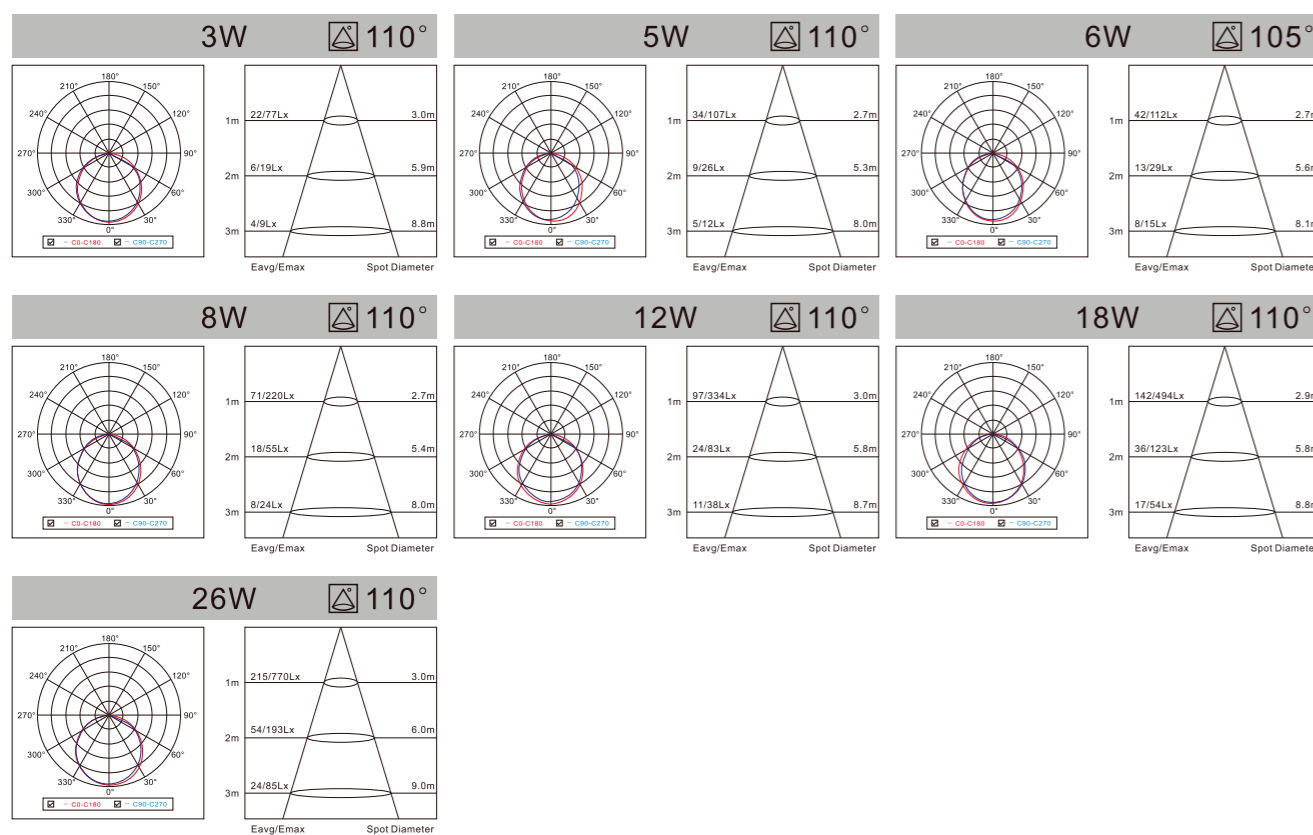

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL03EW03-Y1	● 3W	210-240LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL05EW03-Y1	● 5W	360-420LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL06EW03-YS	● 6W	430-510LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL06EW03-Y1	● 6W	430-510LM	N	Ø 120x28mm	Ø 90-110mm
LP-DL08EW03-Y1	● 8W	560-650LM	N	Ø 120x28mm	Ø 90-110mm
LP-DL12EW03-Y1	● 12W	880-1020LM	N	Ø 185x28mm	Ø 155-175mm
LP-DL18EW03-Y1	● 18W	1450-1530LM	N	Ø 225x28mm	Ø 195-215mm
LP-DL26EW03-Y1	● 26W	2110-2210LM	N	Ø 225x28mm	Ø 195-215mm

Color Temperature



CCT Adjustable



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h


IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-05EWS01-Y	● 5W	425-500LM	N	Ø 88X28mm	⌀ 65-80mm
LPDL-08EWS01-Y	● 8W	680-720LM	N	Ø 112X30mm	⌀ 90-100mm
LPDL-12EWS01-Y	● 12W	1020-1060LM	N	Ø 175X33mm	⌀ 145-150mm
LPDL-18EWS01-Y	● 18W	1530-1570LM	N	Ø 222X35mm	⌀ 185-200mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-05EWS01-YCCT	● 5W	425-500LM	N	Ø 88X28mm	⌀ 65-80mm
LPDL-08EWS01-YCCT	● 8W	680-720LM	N	Ø 112X30mm	⌀ 90-100mm
LPDL-12EWS01-YCCT	● 12W	1020-1060LM	N	Ø 175X33mm	⌀ 145-150mm
LPDL-18EWS01-YCCT	● 18W	1530-1570LM	N	Ø 222X35mm	⌀ 185-200mm

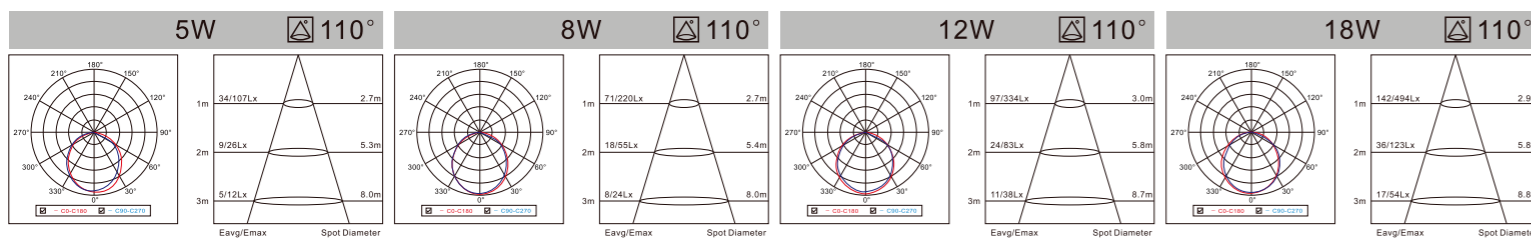

Color Temperature





A/AS SERIES LED DOWN LIGHT

LED DOWN LIGHT AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL07A01-YX	● 7W	550-650LM	N	∅ 98x47mm	∅ 75-85mm
LP-DL10A01-YX	● 10W	850-920LM	N	∅ 115x47mm	∅ 95-105mm
LP-DL15A01-YX	● 15W	1350-1450LM	N	∅ 140x51mm	∅ 120-130mm
LP-DL20A01-YX	● 20W	1850-1950LM	N	∅ 180x44mm	∅ 160-170mm
LP-DL30A01-YX	● 30W	2850-2950LM	N	∅ 228x44mm	∅ 205-215mm
LP-DL10A01-FX	● 10W	850-950LM	N	∅ 101x43mm	∅ 80-90mm
LP-DL15A01-FX	● 15W	1350-1450LM	N	∅ 119x43mm	∅ 100-110mm
LP-DL20A01-FX	● 20W	1850-1950LM	N	∅ 140x45mm	∅ 120-130mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07AS01-Y	● 7W	595-635LM	N	∅ 95x26mm	∅ 75-85mm
LPDL-12AS01-Y	● 12W	1020-1060LM	N	∅ 112x28mm	∅ 90-100mm
LPDL-20AS01-Y	● 20W	1700-1740LM	N	∅ 172x28mm	∅ 145-150mm
LPDL-30AS01-Y	● 30W	2550-2590LM	N	∅ 225x28mm	∅ 180-200mm

Material

High Quality Aviation Aluminum

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable



AS SERIES LED DOWN LIGHT



IP65



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07AS01-YW	● 7W	595-635LM	N	∅ 95x26mm	∅ 75-85mm
LPDL-12AS01-YW	● 12W	1020-1060LM	N	∅ 112x28mm	∅ 90-100mm
LPDL-20AS01-YW	● 20W	1700-1740LM	N	∅ 172x28mm	∅ 145-150mm
LPDL-30AS01-YW	● 30W	2550-2590LM	N	∅ 225x28mm	∅ 180-200mm

Color Temperature

Warm White



Cool White




Natural White





G SERIES LED CEILING LIGHT

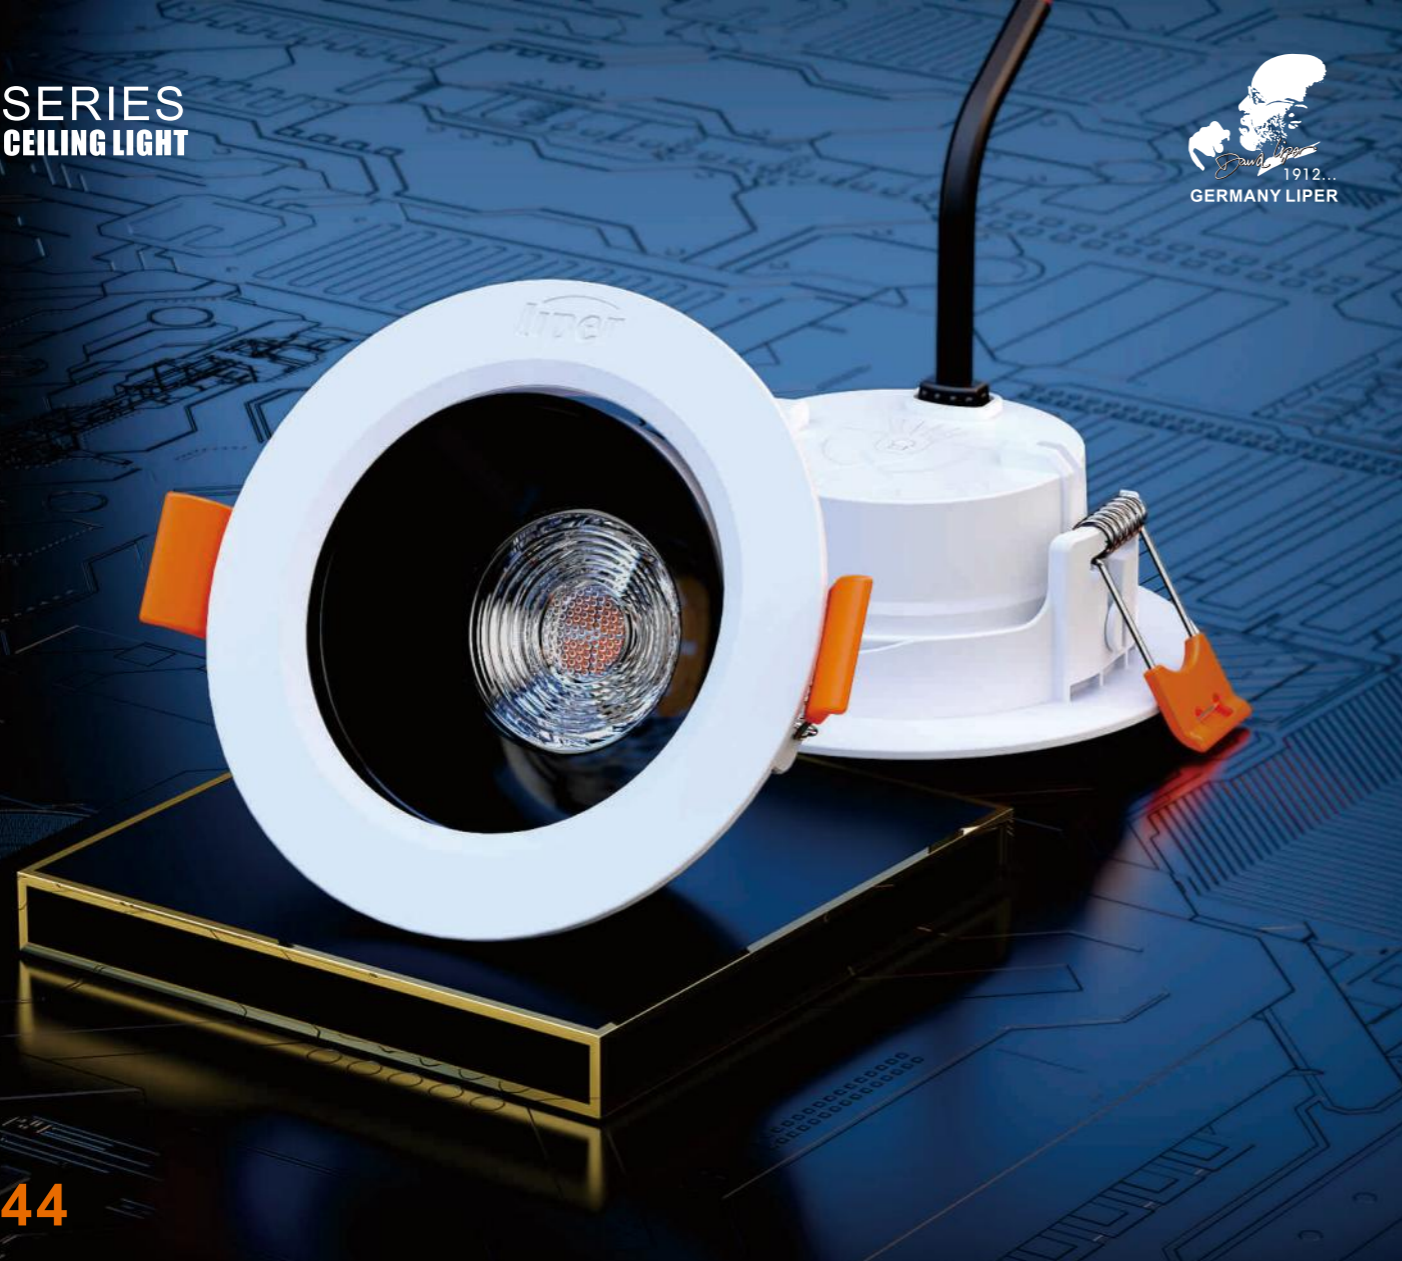

IP44



CCT Adjust by Driver



CCT Adjust by Switch

Color Temperature






LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-CL05G01-Y	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G02-Y	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G01-YB	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G01-YG	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G01-YBG	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-Y	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G02-Y	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-YB	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-YG	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-YBG	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL10G01-Y	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G02-Y	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G01-YB	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G01-YG	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G01-YBG	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm

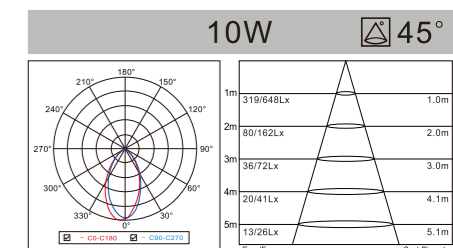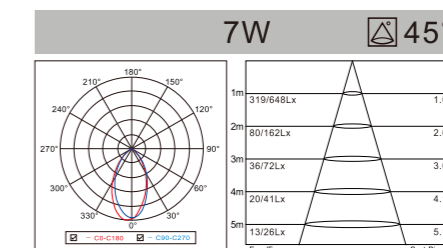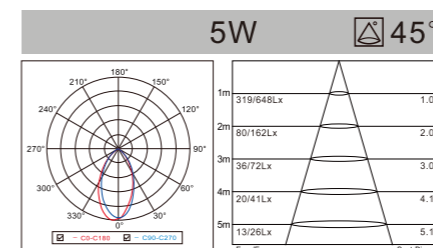



F SERIES LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h



IP44



ANTI-DAZZLE DESIGN



BUCKLE DESIGN, SCREW FREE INSTALLATION



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB12FS01	● 12W	950-1050LM	N	∅ 108x65mm	∅ 90-100mm
LP-COB12FS01-W	● 12W	950-1050LM	N	∅ 108x65mm	∅ 90-100mm
LP-COB12FS02	● 12W	950-1050LM	N	∅ 108x65mm	∅ 90-100mm
LP-COB12FS02-W	● 12W	950-1050LM	N	∅ 108x65mm	∅ 90-100mm

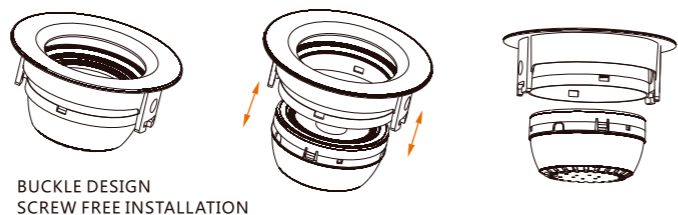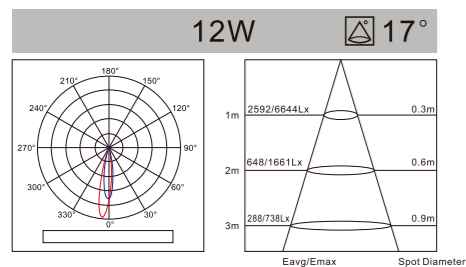

BUCKLE DESIGN
SCREW FREE INSTALLATION

Material

High Quality Aviation Aluminum

Color Temperature

Warm White



Cool White



Natural White



F SERIES LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h



IP44



F01 black inner circle
F02 black inner circle



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB03F01-F1	● 3W	260-310LM	N	∅ 90x35mm	∅ 68-80mm
LP-COB03F02-F1	● 3W	260-310LM	N	∅ 90x35mm	∅ 68-80mm
LP-COB05F01-F1	● 5W	350-360LM	N	∅ 90x35mm	∅ 68-80mm
LP-COB05F02-F1	● 5W	350-360LM	N	∅ 90x35mm	∅ 68-80mm

LP-COB08F01-F1	● 8W	630-720LM	N	∅ 110x50mm	∅ 90-100mm
LP-COB08F02-F1	● 8W	630-720LM	N	∅ 110x50mm	∅ 90-100mm

LP-COB12F01-F1	● 12W	950-1050LM	N	∅ 136x65mm	∅ 120-130mm
LP-COB12F02-F1	● 12W	950-1050LM	N	∅ 136x65mm	∅ 120-130mm



F SERIES LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB03F01-S	● 3W	220-280LM	N	Ø 72x35mm	⌀ Ø 60mm
LP-COB03F02-S	● 3W	220-280LM	N	Ø 72x35mm	⌀ Ø 60mm
LP-COB03F01-Y1	● 3W	260-310LM	N	Ø 90x35mm	⌀ Ø 68-80mm
LP-COB03F02-Y1	● 3W	260-310LM	N	Ø 90x35mm	⌀ Ø 68-80mm
LP-COB05F01-Y1	● 5W	350-360LM	N	Ø 90x35mm	⌀ Ø 68-80mm
LP-COB05F02-Y1	● 5W	350-360LM	N	Ø 90x35mm	⌀ Ø 68-80mm
LP-COB08F01-Y1	● 8W	630-720LM	N	Ø 110x50mm	⌀ Ø 90-100mm
LP-COB08F02-Y1	● 8W	630-720LM	N	Ø 110x50mm	⌀ Ø 90-100mm
LP-COB12F01-Y1	● 12W	950-1050LM	N	Ø 136x65mm	⌀ Ø 120-130mm
LP-COB12F02-Y1	● 12W	950-1050LM	N	Ø 136x65mm	⌀ Ø 120-130mm

LP-COB05F01-YT1	● 5W	310-360LM	N	Ø 90x35mm	⌀ Ø 68-80mm
LP-COB05F02-YT1	● 5W	310-360LM	N	Ø 90x35mm	⌀ Ø 68-80mm



10°/20°/30° Selectable


Color Temperature



FS SERIES LED CEILING LIGHT


LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

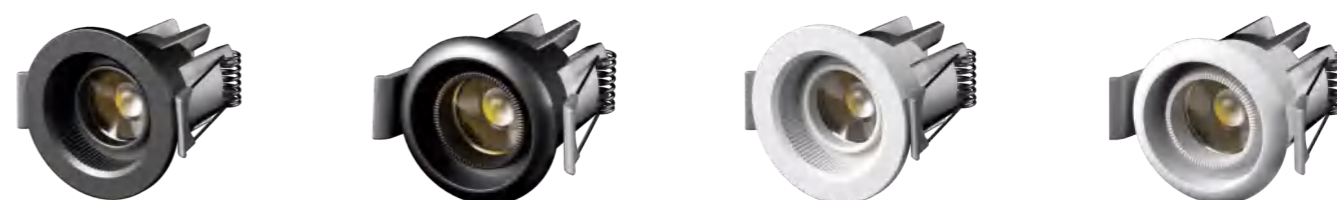

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCOB-04FS01-YB	● 4W	320-340LM	N	Ø 40x41	⌀ Ø 30-35mm
LPCOB-04FS01-YBR	● 4W	320-340LM	N	Ø 35x41	⌀ Ø 30mm
LPCOB-04FS01-Y	● 4W	320-340LM	N	Ø 40x41	⌀ Ø 30-35mm
LPCOB-04FS01-YR	● 4W	320-340LM	N	Ø 35x41	⌀ Ø 30mm

Color Temperature

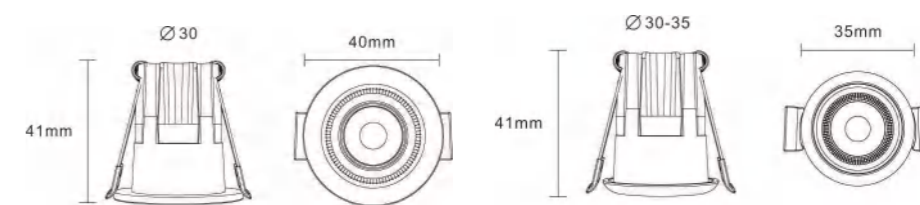






LED TRACK LIGHT

AC:100/220-240V CRI≥90 H:30000h





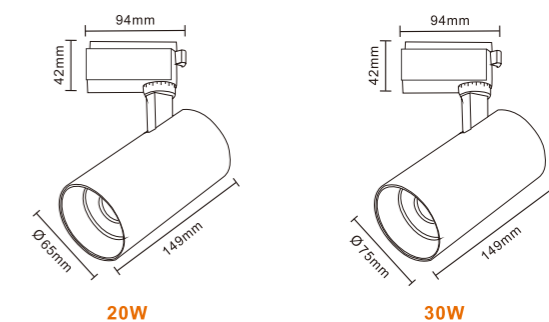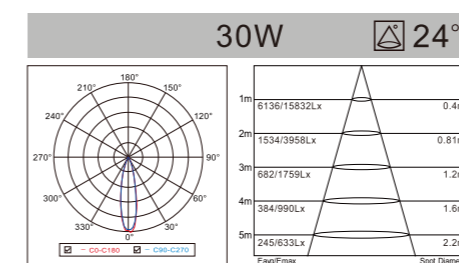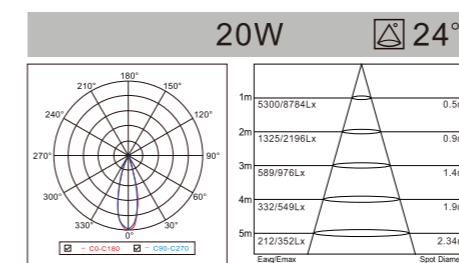

01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-20F01	● 20W	1950-2150LM	N	93X65X207mm
LPTRL-30F01	● 30W	3325-3675LM	N	94X75X207mm
LPTRL-20F02	● 20W	1950-2150LM	N	93X65X207mm
LPTRL-30F02	● 30W	3325-3675LM	N	94X75X207mm



Material
High Quality Aviation Aluminum

Color Temperature
 Warm White  Cool White  Natural White  CCT Adjustable 



ALL IN ONE
2700K 4000K 6500K






E SERIES LED TRACK LIGHT



ADJUSTABLE BEAM ANGLE

15°
30°
45°
60°

R9 > 0
15W/30W

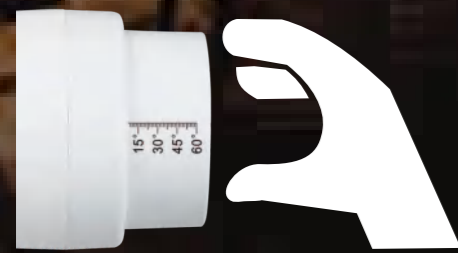


LED TRACK LIGHT

AC:100/220-240V CRI ≥ 80 H:30000h



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-15E01	● 15W	920-1050LM	N	130X63X95mm
LPTRL-30E01	● 30W	1950-2080LM	N	160X94X130mm
LPTRL-15E02	● 15W	920-1050LM	N	130X63X95mm
LPTRL-30E02	● 30W	1950-2080LM	N	160X94X130mm

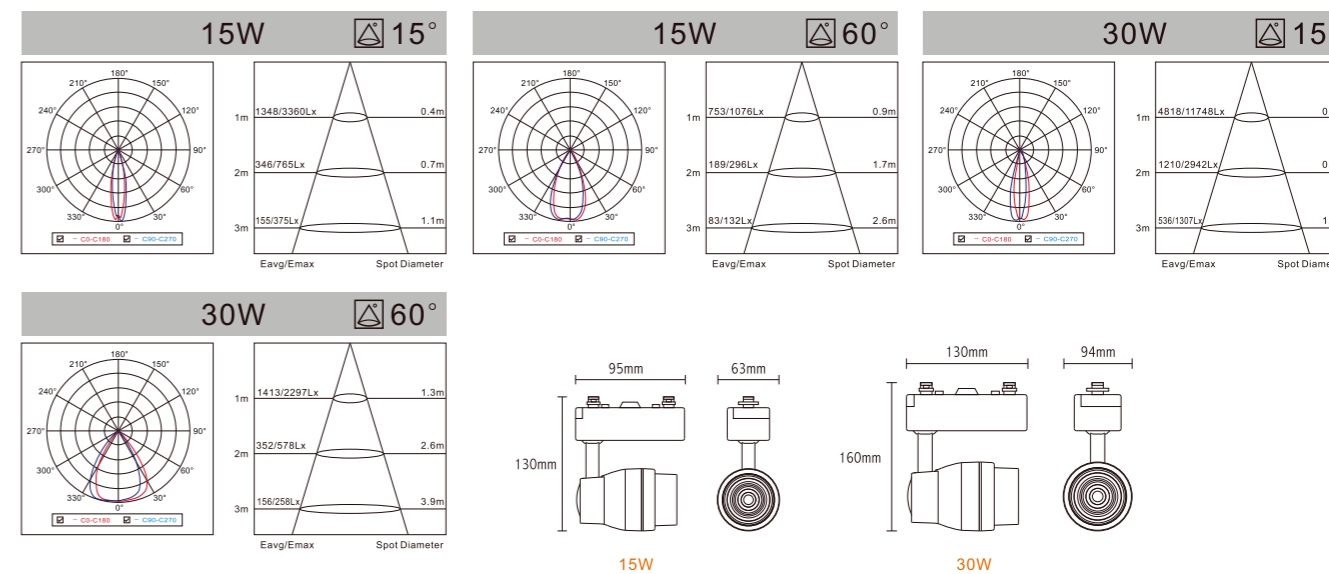

Material

High Quality Aviation Aluminum

Color Temperature

Warm White Cool White Natural White




A/E SERIES
LED PANEL LIGHT



LED LOUVER FITTING

AC:100/220-240V CRI≥80 H:30000h

50W $\triangle 120^\circ$

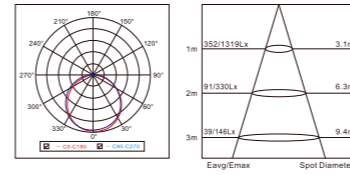


40W $\triangle 120^\circ$


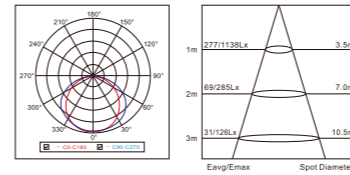


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-LF60A60 40W	● 40W	3680-3960LM	N	600X7X600mm
LP-LF60A60 50W	● 50W	4780-4950LM	N	600X7X600mm

40W $\triangle 115^\circ$

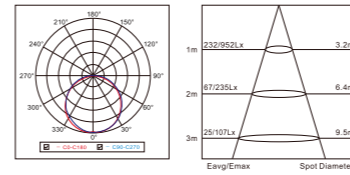

50W $\triangle 115^\circ$

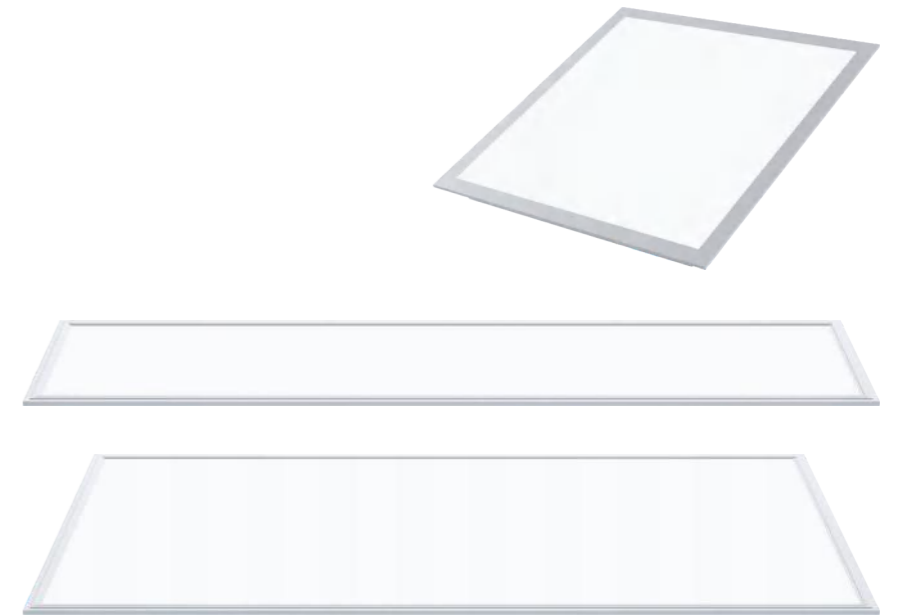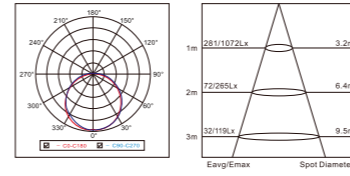

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPLF-60EF60 40W	● 40W	3250-3370LM	N	600X600X30mm
LPLF-60EF60 50W	● 50W	4380-4510LM	N	600X600X30mm
LPLF-120EF60 80W	● 80W	7008-7216LM	N	1200X600X30mm
LPLF-120EF30 40W	● 40W	3250-3370LM	N	1200X300X30mm

Color Temperature





straight connection



"I" shape connector



Right angle connection



"L" shape connector

LED TUBE AC:100/220-240V CRI≥80 H:30000h




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL-08D04	● 8W	600-680LM	N	600X30X37mm
LPTL-16D04	● 16W	1260-1350LM	N	1200X30X37mm
LPTL-16D04-2	● 16W	1260-1350LM	N	600X37X63mm
LPTL-32D04-2	● 32W	2550-2670LM	N	1200X37X63mm

8W-LPTL-08D04




125°

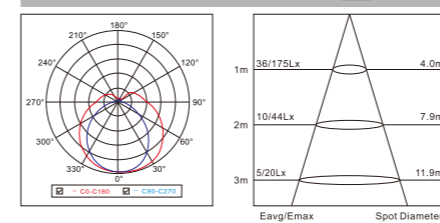


16W-LPTL-16D04




125°

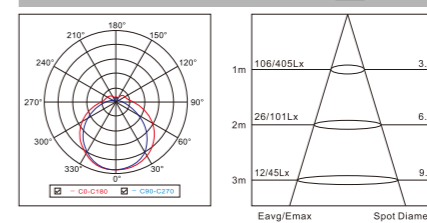

16W-LPTL-16D04-2





130°

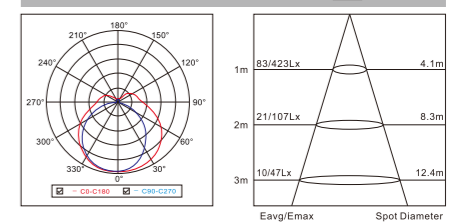

32W-LPTL-32D04-2



130°

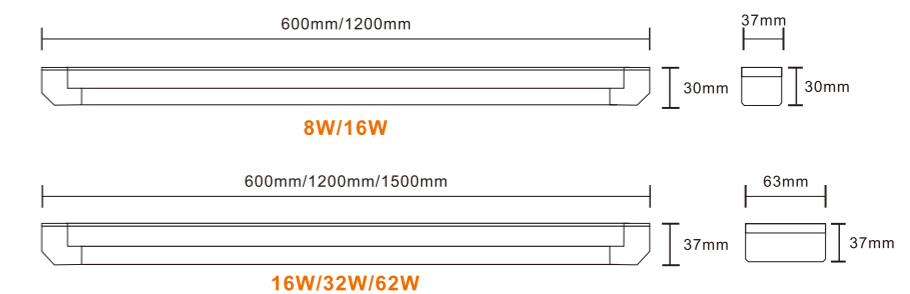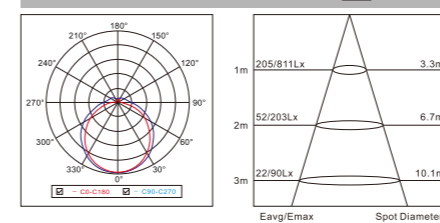

Color Temperature

Warm White



Cool White




Natural White








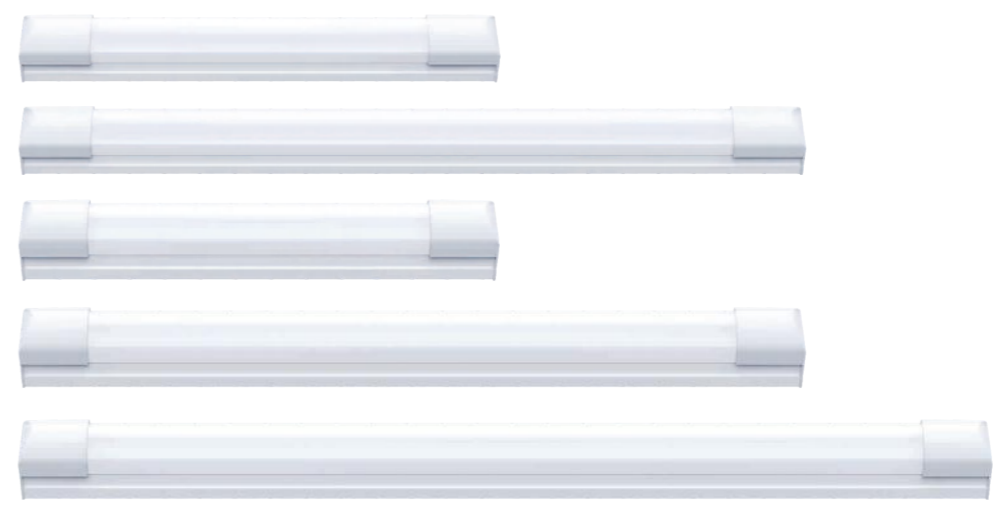


LED TUBE AC:100/220-240V CRI≥80 H:30000h

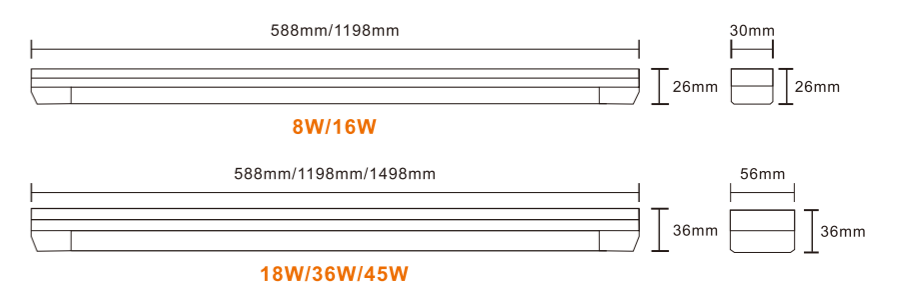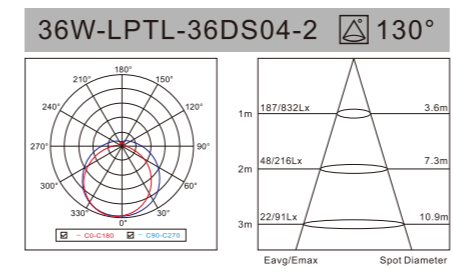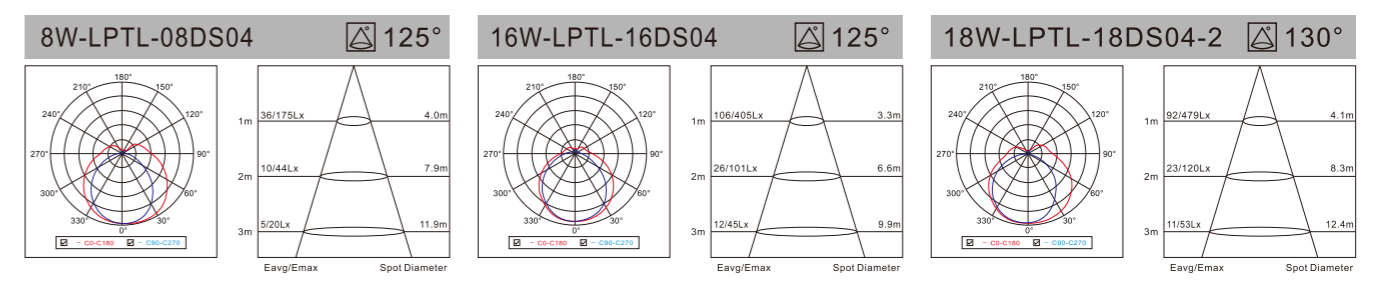

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL-08DS04	8W	600-680LM	N	588X26X30mm
LPTL-16DS04	16W	1260-1350LM	N	1198X26X30mm
LPTL-18DS04-2	18W	1420-1530LM	N	588X36X56mm
LPTL-36DS04-2	36W	2880-2950LM	N	1198X36X56mm




Color Temperature

Warm White  Cool White  Natural White 

**T5 SERIES
LED TUBE**



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL04D05	● 4W	360-410LM	N	300x23x35mm
LPTL08D05	● 8W	720-820LM	N	600x23x35mm
LPTL12D05	● 12W	1050-1200LM	N	900x23x35mm
LPTL16D05	● 16W	1400-1610LM	N	1200x23x35mm


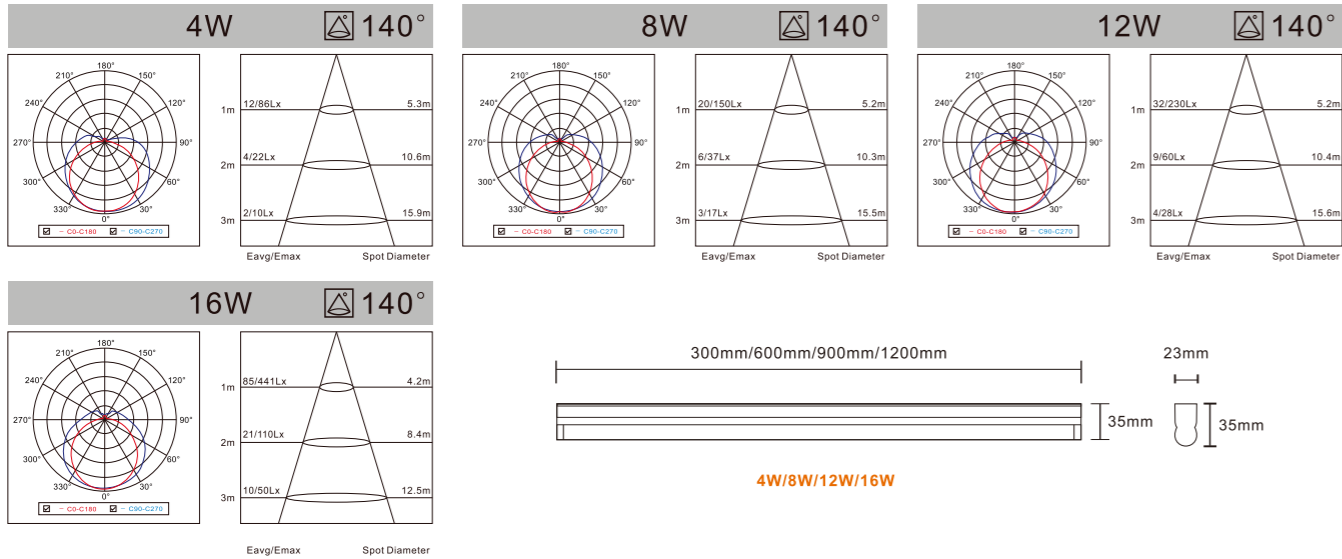


Color Temperature






**T8 SERIES
LED TUBE**

LED TUBE AC:100/220-240V CRI≥80 H:30000h

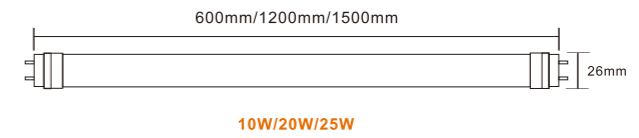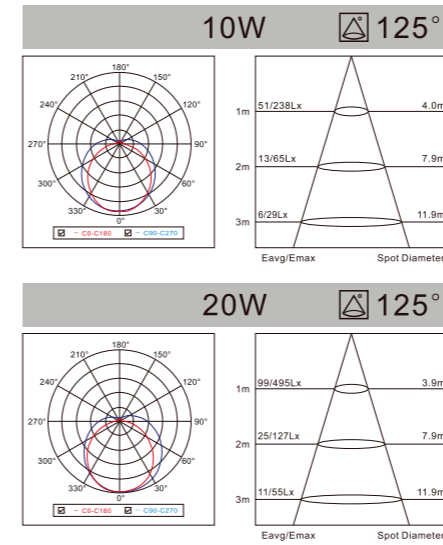


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL10C02	● 10W	800-900LM	N	∅ 26x600mm
LPTL20C02	● 20W	1600-1800LM	N	∅ 26x1200mm
LPTL25C02	● 25W	2000-2250LM	N	∅ 26x1500mm

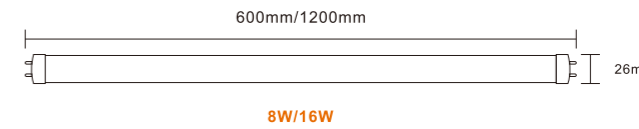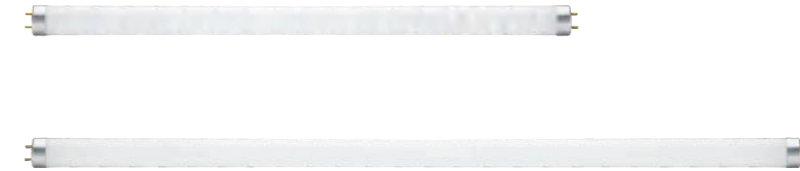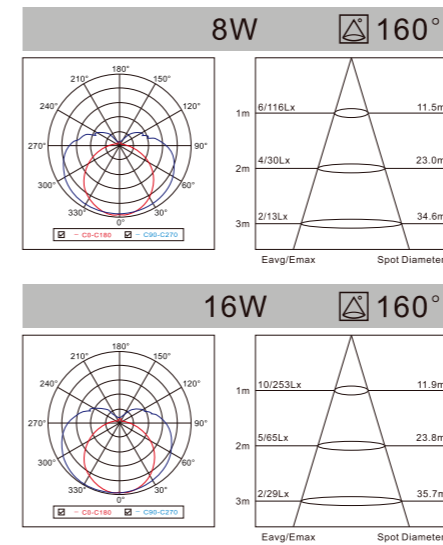


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL08E02	● 8W	720-880LM	N	∅ 26x600mm
LPTL16E02	● 16W	1440-1760LM	N	∅ 26x1200mm

Color Temperature




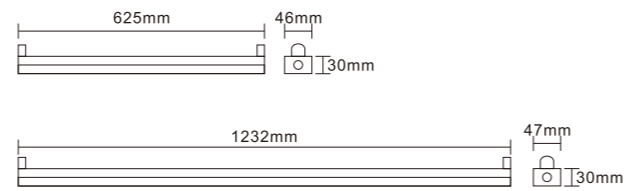

Modell Model	Produktgröße Product Size
CW.A 600mm Single Tube	625x46x30mm
CW.A 1200mm Single Tube	1232x47x30mm
CW.B 600mm Double Tube	625x46x30mm
CW.B 1200mm Double Tube	1232x47x30mm

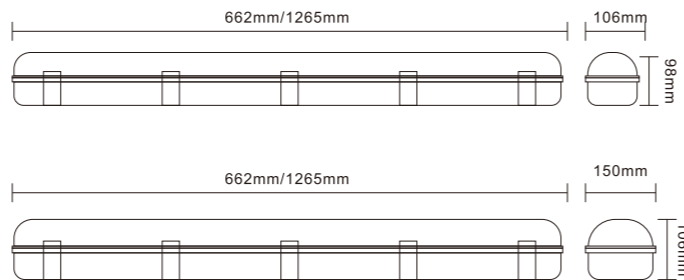

Modell Model	Produktgröße Product Size
SY6118-H 600mm Single Tube	662x98x106mm
SY6136-H 1200mm Single Tube	1265x98x106mm
SY6218-H 600mm Double Tube	662x106x150mm
SY6236-H 1200mm Double Tube	1265x106x150mm

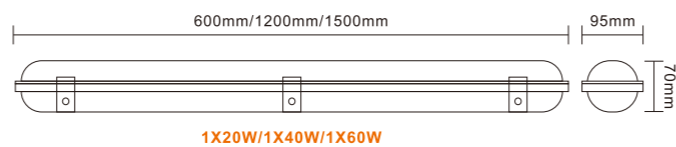

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
SY6120-H(LED)	● 1X20W	1650-1750LM	N	600X70X95mm
SY6140-H(LED)	● 1X40W	3350-3450LM	N	1200X70X95mm
SY6160-H(LED)	● 1X60W	5550-5650LM	N	1500X70X95mm

LED STRIPLIGHT

AC: 220-240V CRI≥80 H:30000h


**IP65
AC 220-240V**



**Power Supply
Carry 50M**

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSL-7A01	● 7W/M	700LM/M	N	8mm
LPSL-12A01	● 12W/M	1200LM/M	N	11mm

**IP20
DC24V**

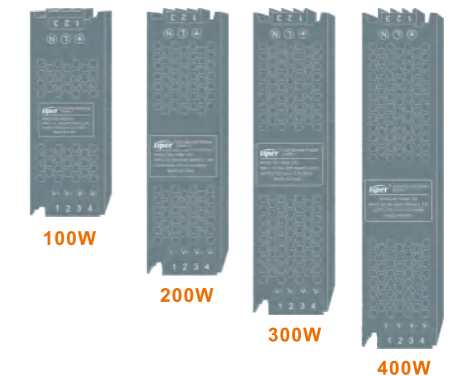

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-20A01	● 20W/M	2400LM/M	N	10mm
LPSTL-25A01	● 25W/M	3000LM/M	N	15mm
LPSTL-30A01	● 30W/M	3600LM/M	N	28mm/30mm
LPSTL-40A01	● 40W/M	4800LM/M	N	40mm

Color Temperature





A SERIES LED STRIP LIGHT

LED STRIPLIGHT

AC: 220-240V CRI ≥ 80 H: 30000h

IP20
DC24V
COB



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-11A01	● 11W/M	1100LM/M	N	8MM

IP68
DC24V



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-10A01	● 10W/M	1250LM/M	N	8MM

Color Temperature



CX SERIES LED Magnetic Track light





CX SERIES

LED Magnetic Track light

LED MAGNETIC LIGHT

DC48V CRI≥90 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-FG-10	● 10W	850-935LM	N	304X22X45mm
LP-CX-20CB-FG-20	● 20W	1700-1785LM	N	604X22X45mm
LP-CX-20CB-FG-30	● 30W	2550-2635LM	N	904X22X45mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-GS-6	● 6W	510-595LM	N	134X22X45mm
LP-CX-20CB-GS-12	● 12W	1020-1105LM	N	220X22X46mm
LP-CX-20CB-GS-18	● 18W	1530-1615LM	N	328X22X47mm
LP-CX-20CB-GS-24	● 24W	2040-2125LM	N	435X22X47mm

Color Temperature



CX SERIES

LED Magnetic Track light

LED MAGNETIC LIGHT

DC48V CRI≥90 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-DG2-10	● 10W	850-935LM	N	46X162mm
LP-CX-20CB-DG2-20	● 20W	1700-1785LM	N	56X196mm
LP-CX-20-HS-12	● 12W	1020-1080LM	N	40X300mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-GS-ZD-6	● 6W	510-595LM	N	134X22X85mm
LP-CX-20CB-GS-ZD-12	● 12W	1020-1105LM	N	220X22X85mm
LP-CX-20CB-GS-ZD-18	● 18W	1530-1615LM	N	328X22X85mm
LP-CX-20CB-GS-ZD-24	● 24W	2040-2125LM	N	435X22X85mm

Color Temperature



